User Manual

Verison 1.00

VMAX D1

Model : VMAX D1 8/16

DW DIGITAL WATCHDOG

Everything's Digital

PRECAUTIONS

Warning

Unauthorized reproduction of all or part of this manual is strictly prohibited.
The FIGURES in this manual are only for illustration purposes. They may differ from the actual product.
The specifications and design of the product are subject to change without prior notice for purposes of quality improvement.

Cautions

To get the best use out of the product, be sure to read the cautions before using the product.
For safety, please take note of the following:

Instructions Before Using the Product

To prevent electric shock when installing, moving, or opening the DVR and peripheral devices, connect and disconnect the cables as instructed. All cables must be connected to grounded power outlets.
If the product is installed near a power outlet, make sure it can easily be unplugged.
Do not use the DVR in water or in wet places.
Keep the plastic packing materials used for the DVR or other peripheral devices out of reach of children (may cause suffocation).

Installation Environment of the DVR

Maintain the following conditions: operating temperature of 5˚C ~ 40˚C, operating humidity of 10% ~ 80%.
Install the DVR in a safe place that is free from external vibration.
Install the DVR in a well-ventilated place.
To protect the hard disk from data loss and breakdown, install the DVR away from magnetic materials.
When using a rack other than the standard one, use a separate table with sufficient spacing, i.e., 60cm from the floor, 50cm from the ceiling, and 20cm from the side and back walls and other objects.

Safety Notes on the DVR

When installing additional boards and HDD, separate the power cable and completely turn off the power supplied to the DVR.
Keep the product away from heat-generating devices, such as heaters.
Do not use a damaged power cord.
To prevent problems due to magnetic interference and electric surge, use only grounded cables and power outlets.
If the power cord is connected, do not touch the power unit. If the power cord is connected, electric current is still flowing internally even after the switch is turned OFF.
Do not place a heavy object on top of the product.
Do not drop a conductive object in the ventilation holes.
Allot sufficient space for system cabling.
Use only the parts indicated in the manual. Do not disassemble, repair, or modify the product without permission.
Incorrect system setup may cause malfunction.
Shut down the system normally as instructed in the manual.

Safety Notes on the Lithium Battery

Replace lithium batteries as instructed to avoid danger.
Dispose used lithium batteries properly.

Warning and Caution are indicated as follows.

	Possible Injury or Product Damage
	Risk of Minor Injury or Product Damage
	Cautions for the Usage of the Product
	Information for the Usage of the Product

TABLE OF CONTENTS

1 INTRODUCTION 5
Specifications 5
Components 5
Major Features 6
Front Panel View 7
Rear Panel View 7
2 INSTALLATION & CONNECTION 8
Connection Order 8
Terminal Block 9
PTZ Camera & Keyboard Controller 9
Sensor Connection 9
Relay Connection 9
POS Connection 9
3 SYSTEM CONTROL 10
Remote Controller 10
Mouse 10
Power ON 10
4 SETUP 11
Time 12
Camera 14
Recording 20
Schedule 25
Disk Configuration 26
Network Configuration 28
System 33
5 LIVE 36
Real-Time Live View 36
Status Icons 37
Control Bar 37
System Login 38
System Logout 38
Screen Division and Auto Sequence 39
Zoom 40
Instant Recording 40
6 SEARCH 41
Express Search 41
Jump to Last Saved Data 42
Jump to First Saved Data 42
Go to Last Played Time 42
7 PLAYBACK 43
Playback Control Bar 43
Smart Search 44
Express Search 45
Multi Time 45
Multi Day 45
Multi Channel 45
Panorama Playback 45
Event 45
Audio 45
Backup 46

Zoom 46
De-Interlace 46
8 BACKUP 47
Backup 48
Capture 49
Print 49
Log Backup 49
Setup Backup 50
NAS Backup 50
9 PTZ 51
Setting a PTZ Camera 51
Controlling a PTZ Camera 52
10 SYSTEM INFORMATION 53
Version 53
System Log 54
Miscellaneous Control 55
Monitor Configuration 56
Channel Grouping 56
11 REMOTE ACCESS 57
Features 57
Connection 57
Live Mode 58
Playback Mode 59
Management 59
12 DNA 61
Setup 61
User Interface 63
Configuration 64
Playback 66
Control 68
Event 69
13 RAID 70
Configuring RAID 70
Destroying RAID 71
APPENDIX 72
Recommended HDD Specification 72
Recommended PTZ Camera Protocol 72
Recommended USB 2.0 Device 72

1 INTRODUCTION

Specifications

		VMAXD1 16	VMAXD1 8
System		Full D1 Digital Video Recorder	
Format		16Ch – D1 480/400	8Ch – D1 240/200
OS		Linux Embedded - Built in Flash Memory	
Video Input		16 BNC	8 BNC
Video Output	**Monitor**	16 BNC, 1 VGA, 1 HDMI	8 BNC, 1 VGA, 1 HDMI
	Spot	4 BNC - Single or Quad	1 BNC - Single or Quad
Audio Input		Line Input : 16 RCA	Line Input : 8 RCA
Audio Output		Line Output : 1 RCA	
Compression Format		Video : Standard H.264 / Audio : G.723	
Recording Speed		1/8, 1/4, 1 ~ 30(25)fps, Total max. D1 480/240(400/200)fps	
Recording Resolution		CIF, 2CIF, 4CIF	
Recording Mode		Continuous, Event (Sensor, Motion, Audio, Pattern, Text), Schedule	
Alarm Interface		16 Sensor Input, NC/NO - Terminal Block 4 Relay Output, NC/NO - Terminal Block	8 Sensor Input, NC/NO - Terminal Block 2 Relay Output, NC/NO - Terminal Block
Video Output Resolution		HDMI : Full HD(1920x1080), WSXGA+(1680x1050), SXGA(1280x1024) VGA : WSXGA+(1680x1050), SXGA(1280x1024) BNC: SDTV(720x480(576))	
POS / ATM Interface		8 RS232C Simplex - Terminal Block	4 RS232C Simplex - Terminal Block
Backup & Copy Access		eSATA, DVD-RW, USB2.0, Network	
Network Access		Ethernet 10/100/1000 - RJ45	
PTZ / Controller Access		RS485 Half Duplex - Terminal Block	
Internal HDD / Internal ODD		SATA HDD Max. 4ea / SATA Type DVD 1ea(Without ODD, HDD 6ea)	
System Operation & Adjustment		Front Panel Button, Mouse, IR Remote Control, Keyboard Controller, Network	
System Upgrade		USB2.0 Memory Stick, Network	
Network		System Automation (Controlled by CMS)	
		NTP Supported	
		CMS / Monitoring by Web Browser / PDA	
Others		17 Languages Supported, Automatic E-mail	
		DC12V, 5A / Operating Temperature [5 ~ 40℃] Weight without HDD [8kg] / Dimension [435 x 4445 x 88 mm]	

Components

After unpacking the product, check whether the following accessories have been included. .

- Remote Controller
- Software CD
- AAA 1.5V Batteries (2 Each)
- Quick Start Guide
- Handle

Major Features

Advanced H.264 Linux Embedded DVR
HEXAPLEX – Live, Playback, Recording, Backup, Network, Configuration
Full HD Output for Playback and Live Display
240fps at D1 for 8 Channel
480fps at D1 for 16 Channel
HDMI, Composite, & VGA Support
Jog Shuffle
Looping Output
Zoom-in Live and Playback
Multi-Record Scheduling
Pre- & Post-Event Recording
Programmable Privacy Zones
8 Sensor Input, 2 Sensor Output for 8 Channel
16 Sensor Input, 4 Sensor Output for 16 Channel
Time Server Function
NAS (Network Attached Storage) Backup Over Ethernet
Multi-User Access
Covert Channel
Network Bandwidth Control
Watermark Verification (Digital Signature Verification)
Go To, Multi-Date & Time, Calendar, Smart, Panorama, and Log Viewer Search
Smart Web Viewer for Live, Playback, Backup, Configuration
Remote Setup, Backup, and Relay Control
Mobile Application for Blackberry, iPhone, Android
Windows Mobile PDA Viewer
RAID 1,5: Rack Mount Available
DVD-RW Built-in
USB 2.0 Built-in
POS Support up to 8 Channel
RS-485 and 4/8 RS-232C Built-in
USB Mouse, IR Remote Control
Up to 6 Internal HDD Supported

Front Panel View

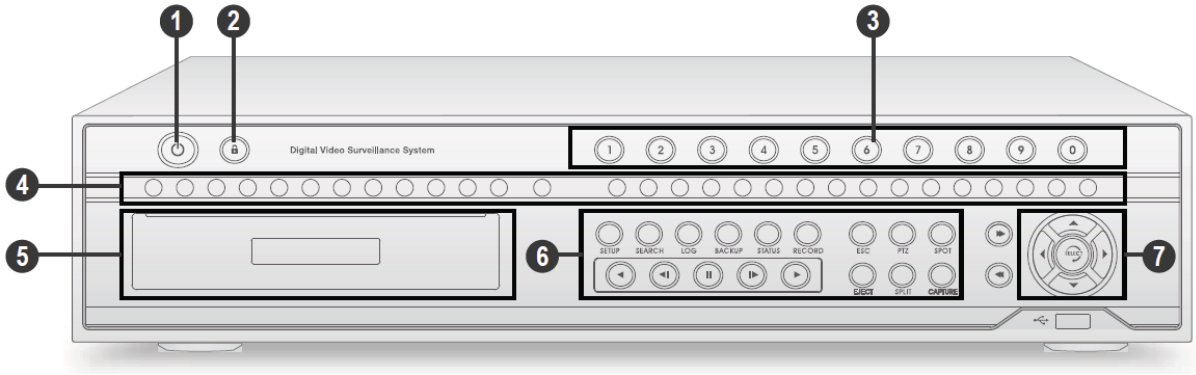

No	Name	Description
1	Power Button	Turn ON or OFF. Authorization is required.
2	Lock Button	Lock your system. Authorization is required.
3	Number Buttons	Select channel.
4	Status Indication	Indicates each functional status.
5	Optical Device Bay	Door for CD-ROM
6	Functional Buttons	Shortcut keys for the indicated function.
7	Directional Button and Select Key	Use instead of mouse control.

Rear Panel View

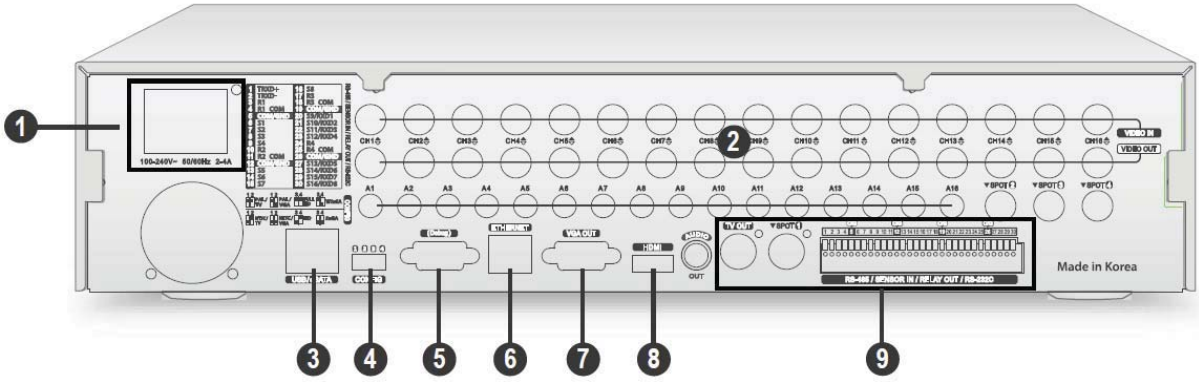

No	Name
1	Power Supply
2	Camera Input, Loop Output, Audio Input, Spot Output
3	USB Connection (USB2.0, e-SATA)
4	Configuration Dip Switch (NTSC/PAL, Monitor Out)
5	RS232C for Console Output
6	Ethernet Port
7	VGA Output
8	HDMI Output for Full HD Display
9	Audio Out, TV Out, Terminal Block (Sensor & Relay Output)

2 INSTALLATION & CONNECTION

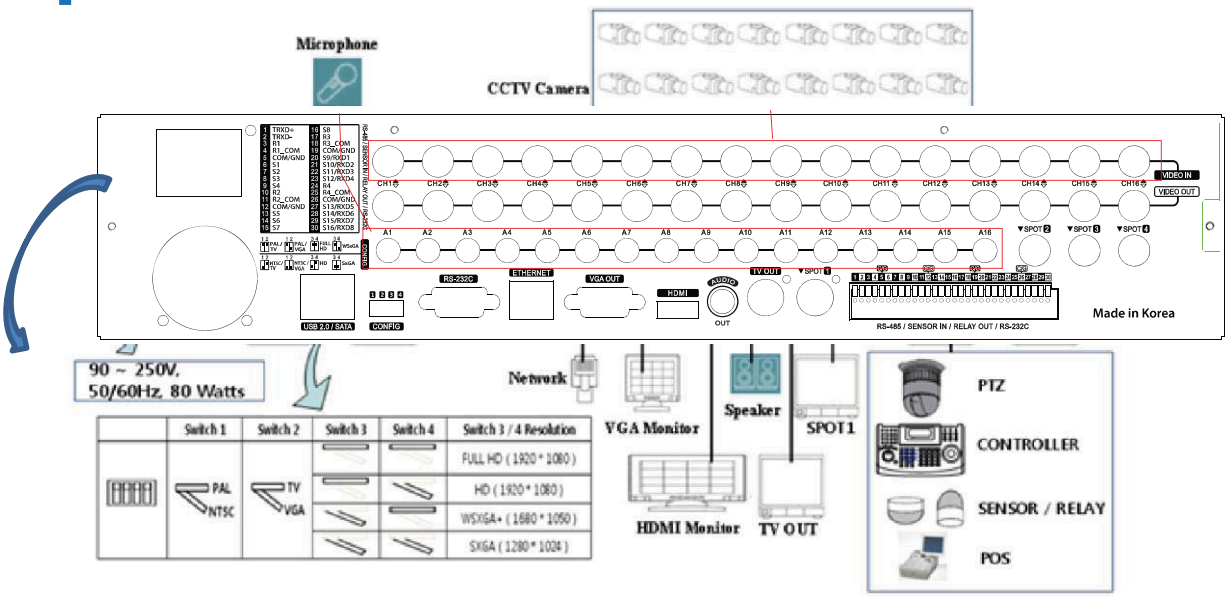

Connection Order

By referring to the diagram above **[Figure 2-1],** make a connection accordingly.

① Connect CCTV Camera Signal to BNC Input on rear panel.

② Set video configuration with combination of dip switch.

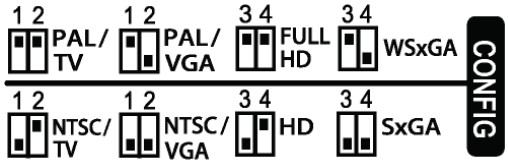

③ Connect display monitor to TV OUT on rear panel.
No GUI is displayed through TV Out port.

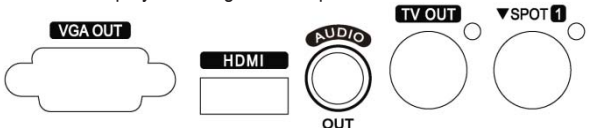

④ Connect VGA monitor to VGA OUT on rear panel and HDMI monitor to HDMI on rear panel.
On VGA and HDMI Output, only the channel title is shown.
For higher resolution (greater than HD), only VGA Output is available.

⑤ Connect Spot Monitor to SPOT # on rear panel.

⑥ The following devices can also be connected:

Devices	DVR Terminal
Internal Hard Drives	6 SATA
Spot Monitor	4 BNC for 16 Channel 1BNC for 8 Channel
Audio	Each Channel
Sensor	Each Channel
Relay	4 for 16 Channel 2 for 8 Channel
POS	8 Connections for 16 Channel 4 Connections for 8 Channel

Terminal Block

The terminal blocks located in the rear of the VMAXD1 are for the connection of the PTZ, Sensor, Relay, and POS. The number of terminal blocks may vary depending on the model.

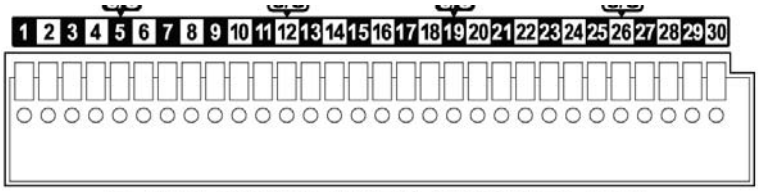

1	TRXD+	16	S8
2	TRXD-	17	R3
3	R1	18	R3_COM
4	R1_COM	19	COM/GND
5	COM/GND	20	S9/RXD1
6	S1	21	S10/RXD2
7	S2	22	S11/RXD3
8	S3	23	S12/RXD4
9	S4	24	R4
10	R2	25	R4_COM
11	R2_COM	26	COM/GND
12	COM/GND	27	S13/RXD5
13	S5	28	S14/RXD6
14	S6	29	S15/RXD7
15	S7	30	S16/RXD8

RS-485 / SENSOR IN / RELAY OUT / RS-232C

PTZ Camera & Keyboard Controller

Connect the PTZ control cable to the Terminal Block, TRXD+ and TRXD-, in the rear panel of the DVR.

You may refer to "**APPENDIX**" in this manual for supported PTZ cameras. A keyboard controller has the same connection as a PTZ camera.

Sensor Connection

Depending on the model, connect the sensor to the terminal blocks S1 ~ S16.

Each input terminal is connected relatively with the channel number.

Sensor and Relay Type
NC (Normal Close): Normally Closed; opens when a signal is received.
NO (Normal Open): Normally Open; closes when a signal is received.

Relay Connection

Relay the output signal to external devices, such as Alarm and Siren.

Connect the relay to R1, R2, R3, or R4 terminal block, depending on the model

POS Connection

Connect the POS Device.
Connect the POS to Terminal Block RXD1 ~ RXD8, depending on the model.

Caution

Depending on its type, the external alarm device may require a power supply. Please be cautious.

3 SYSTEM CONTROL

The VMAXD1 series can be controlled easily by using the front panel buttons, front panel jog/shuttle, remote controller, and/or the mouse.

Remote Controller

No	Name
1	Power Button
2	Number Buttons in Input Number
3	DVR ID Button
4	System Operation and Setup Menu: Enter Menu Esc: Exit to Previous Mode Search: Search Recorded Image Select: Select Category or Execute Sequence Copy: Copy Recorded Videos Direction: Move within the Menu and Submenu
5	Up & Down: Move Up and Down on Log Page PTZ: Shift to PTZ Camera Control Mode
6	Record Button

Sensor and Relay Type
NC (Normal Close): Normally Closed; opens when a signal is received.
NO (Normal Open): Normally Open; closes when a signal is received.

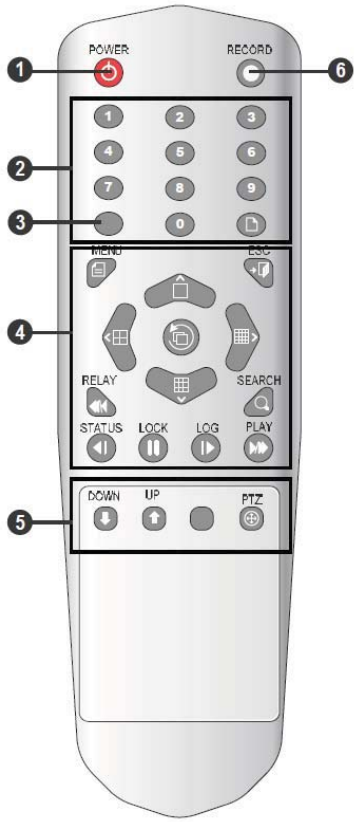

Mouse

The mouse pointer, as shown below, appears if a mouse is connected to the USB terminal located at the front panel.

MOUSE CONTROL FUNCTIONS		
	Click Right Button	Monitoring Mode Move from Monitoring Mode to Monitoring Setup Open or Hide Play Menu Show Submenu of the certain Setup window
	Click Left Button	Select Setup
	Double-Click Right Button	Select Setup
	Double-Click Left Button	Move a certain window

Power ON

① Check the VMAXD1 Series (100-240V, 50/60Hz) and connect the power.
② Booting will be initiated by pressing the power button in the front panel.
③ After booting is finished, the Monitoring Screen, Channel Indication, and Clock are all displayed.

4 SETUP

For Setup menu, click the right button of the mouse or press [Setup] button on the front panel.

ID and Password are required for initial installation. Default ID and Password are shown below.
Local Admin: 00000, User1 : 1111111, User2 : 2222222, User3 : 333333, User4 : 4444444

※ To change the password, right click on mouse, and click **[Setup] > [System] > [Admin. Password].**

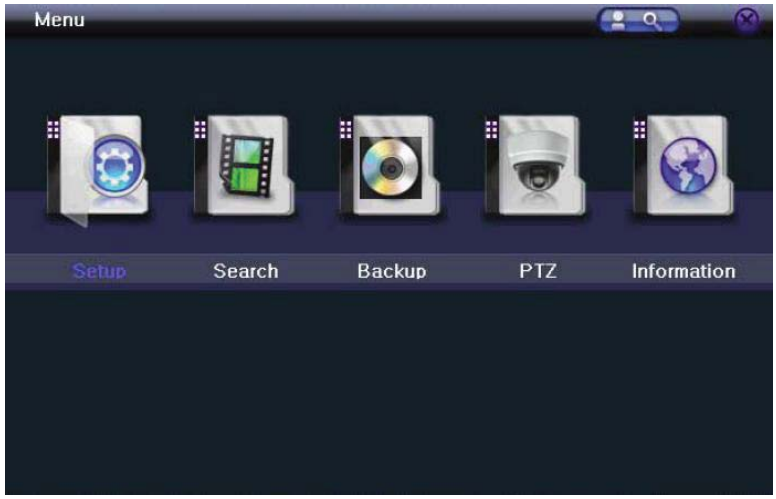

Time

Right-click the mouse button; then select **[Setup] > [Time]**.

Time Sync

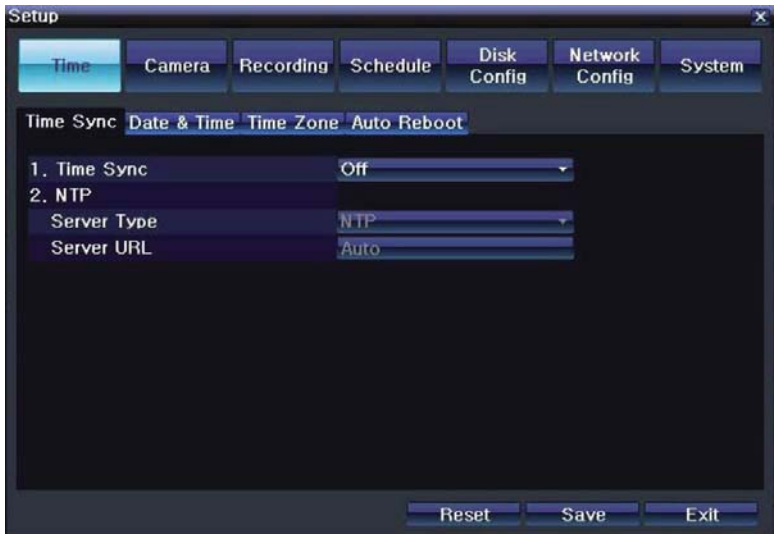

Synchronize the time with the NTP (Network Time Protocol) server. The time will be synchronized with the NTP once every hour.
If synchronization with the NTP server fails, synchronization with RTC will be established.

① Set the Time Sync to NTP or OFF.

② If NTP is selected, input the Server Type and Server URL.

③ For automatic NTP setup, set Server Type to NTP and Server URL as Auto.

NTP setup is only available when Time Sync has been set to **NTP**.
The user can enter the IP only when the server type is DVR.

Date & Time

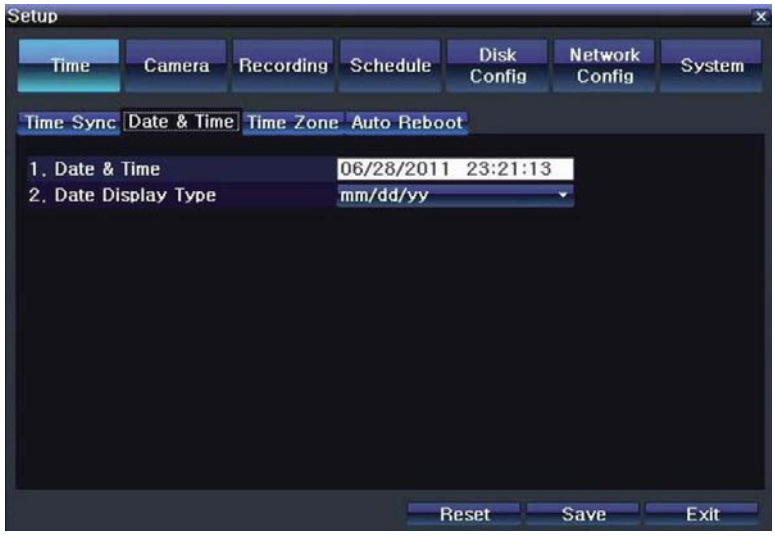

If Time Sync is set to OFF, set the date and time manually.

① Use the mouse or the arrow keys and the SELECT button to set the Year, Month, Day, Hour, Minute, and Second on Date & Time.

② To complete the setting, click the SELECT button or click the right button on mouse.

③ Select the format you wish to display the date at Date Display Type. Select from DD/MM/YY, MM/DD/YY, and YY/MM/DD

Only available when Time Sync is off.

Time Zone

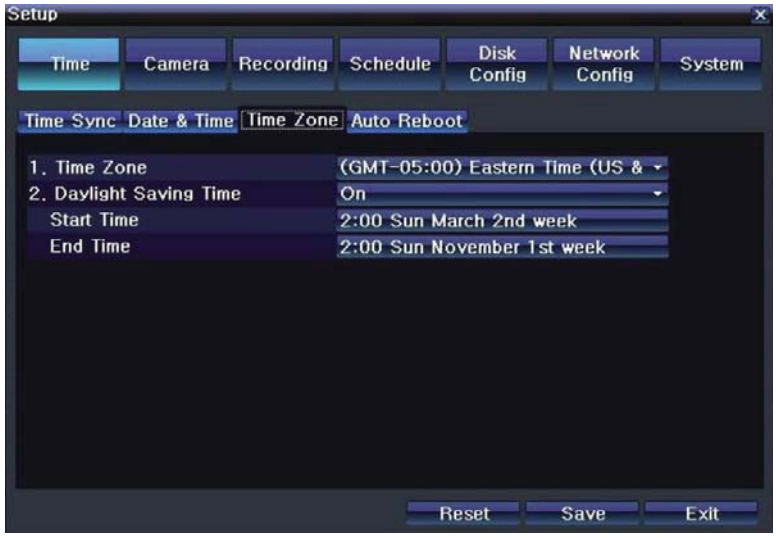

① Select your local Time Zone.

② Turn ON or OFF the daylight savings time (DST).

③ If DST has been set to ON, select the Start Time and End Time for DST.

※ For a weekly setting in the **[Start Time]** and **[End Time]** fields, set Day to 0.

※ After the DST has been selected, the existing data will display as "OLD_" in the search and log list.

Auto Reboot

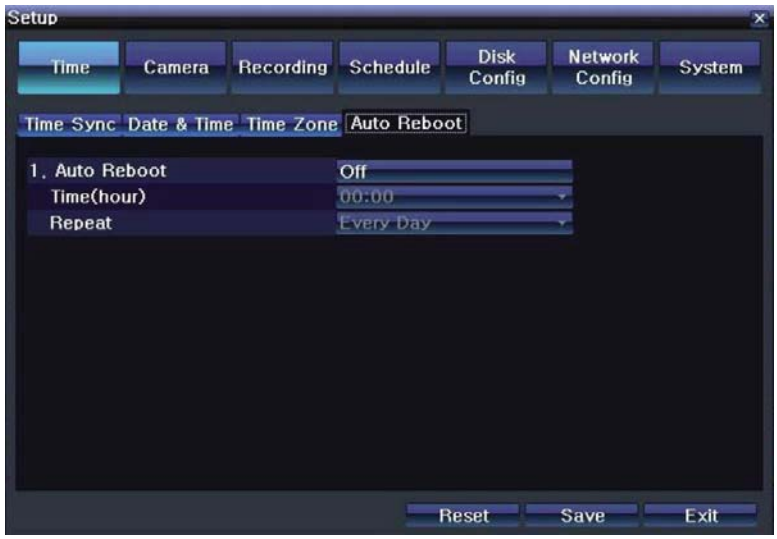

To help keep your system healthy, configure your VMAXD1 to reboot automatically.

① Use your mouse to set the Auto Reboot to ON or OFF..

② Select the exact time for Auto Reboot, and select the day of the week you wish to perform Auto Reboot.

Camera

Right-click mouse button; then select **[Setup] > [Camera]**.

Camera

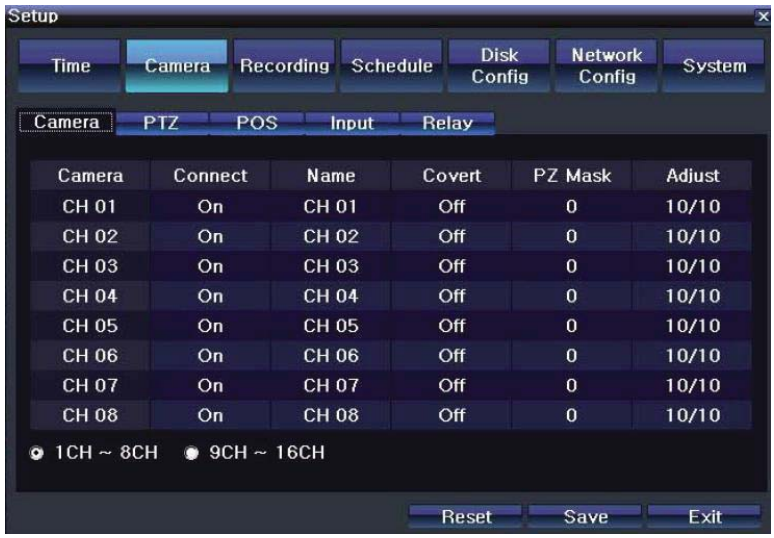

To setup a camera, select the Camera tab.

Connect: Connect or disconnect the camera channel. ON means cameras is connected. To disconnect, turn camera OFF.

※ When the camera channel is set to disconnected, the video contents will not be displayed even if the camera is actually connected.

Name: Name each camera.

① Move mouse cursor above the name field and double click the left mouse button.

② Input camera name on input panel. Up to 20 letters are allowed.

Covert: Turn ON to hide the camera on the monitoring screen and display a black screen.

※ Although the display screen is black, data is still being recorded and saved, depending on the recording schedule.

PZ Mask: Used to hide a certain area of the real-time monitoring screen.

① To setup the PZ Mask Area, move cursor above the PZ Mask field for the channel you wish to set and click the left mouse button.

② The channel will be displayed with grid lines. Select the blocks you wish to mask by clicking and dragging the mouse.

③ Right click mouse button when setup has been completed.

Adjust: Select to adjust the camera's Brightness, Contrast, Color, Saturation, Sharpness, and Camera Position. When clicked, the single channel mode appears with the Adjust window.

Excessively moving the camera up, down, right, or left may cause black or gray areas to appear on the display screen. The level at which such condition does not occur is based on the proper control range for the camera.

PTZ

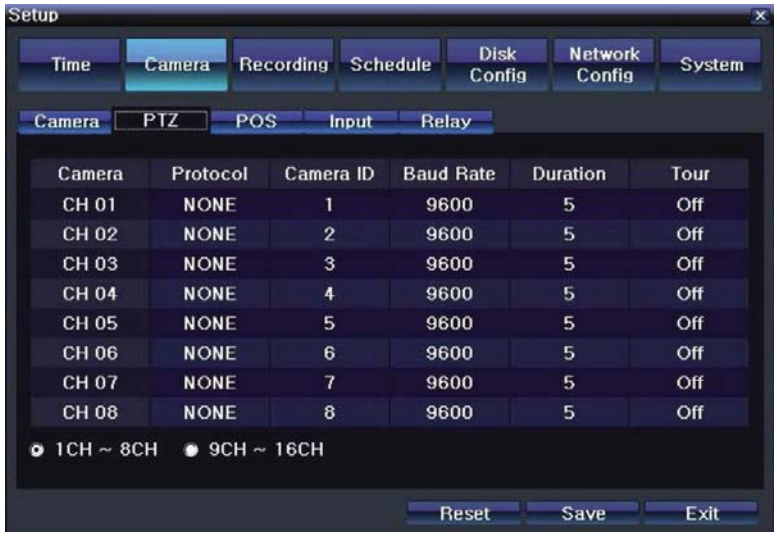
Setup
Time
Camera
Recording
Schedule
Disk Config
Network Config
System
Camera
PTZ
POS
Input
Relay
Camera | Protocol | Camera ID | Baud Rate | Duration | Tour
CH 01 | NONE | 1 | 9600 | 5 | Off
CH 02 | NONE | 2 | 9600 | 5 | Off
CH 03 | NONE | 3 | 9600 | 5 | Off
CH 04 | NONE | 4 | 9600 | 5 | Off
CH 05 | NONE | 5 | 9600 | 5 | Off
CH 06 | NONE | 6 | 9600 | 5 | Off
CH 07 | NONE | 7 | 9600 | 5 | Off
CH 08 | NONE | 8 | 9600 | 5 | Off
1CH ~ 8CH
9CH ~ 16CH
Reset
Save
Exit

To setup a PTZ camera, select the PTZ tab.

① Select the Protocol for the PTZ camera you are using.

② Setup Camera ID and Baud Rate. Check your camera manual for the information.

③ Set a Tour, so camera can automatically move between different presets. Configure up to two Tours, and each tour can have up to 8 presets

④ If a tour has been set, set the Duration for the staying time when the tour is activated.

POS

To setup a Point-of-Sale (POS) device, connect the POS device to the Terminal Block connection for RS232C.

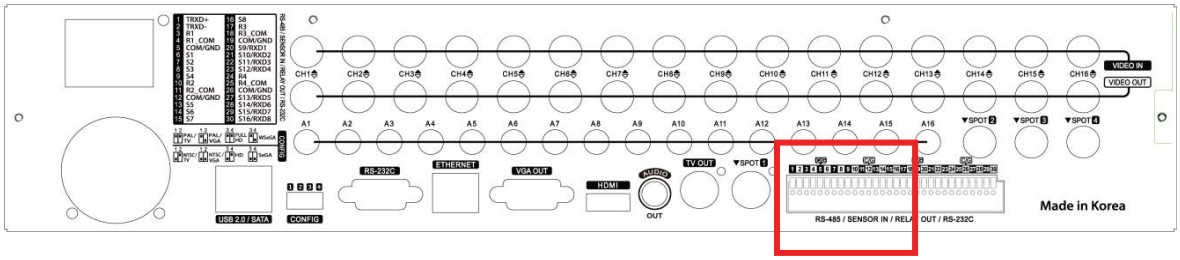

Go to **[Setup] > [System] > [Sensor/POS Port]**, and select POS (1-8).
Go to **[Setup] > [Camera] > [POS]**, and select the protocol, baud rate, and character code for your POS device.
※The VMAXD1 only indicates ASCII Characters.

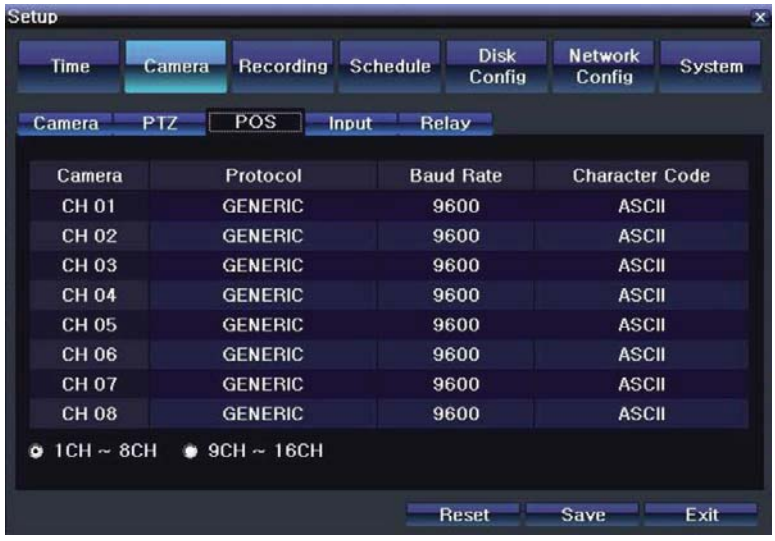

When the POS device has been configured, setup the VMAXD1 to record any transactions sent from the POS device. Go to **[Setup] > [Recording] > [Recording]**, and make sure Text is set to ON.

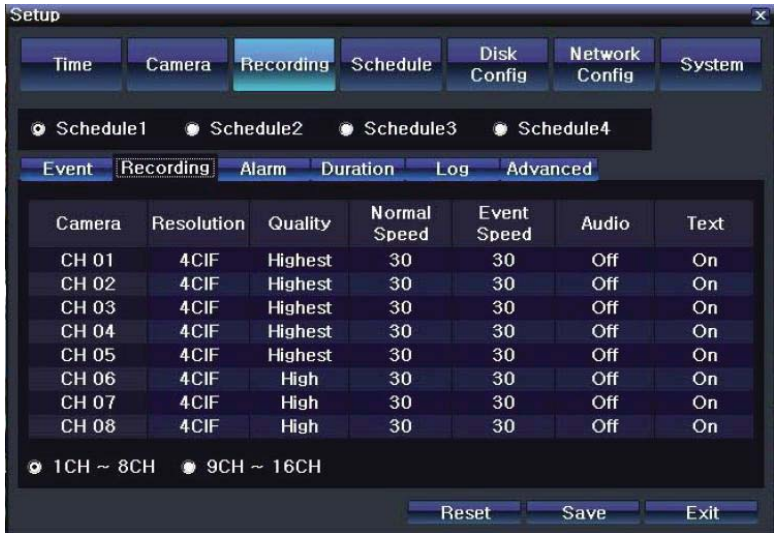

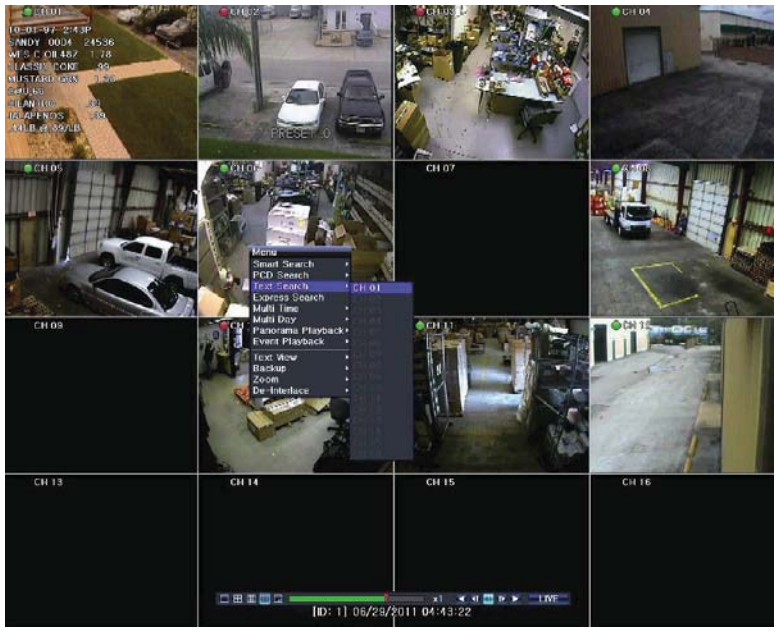

User can perform a search by looking up an item on the POS transaction.

① To perform a search based on POS transactions, click the right mouse button during Playback Mode, and click **[Text Search] > [CH##].**

② A Keyboard will appear. Using the mouse, type in the item you wish to search; then click Search button.

The keyboard is case sensitive.

③ The first recorded image with the item will appear. Use the Playback Control Bar to playback the video.

④ To move to the next or previous POS search result, use directional keys on the front panel or use the mouse and the control bar.

During playback, user can choose to display or hide the POS transaction on the recording video.

① To hide the POS transactions, click the right mouse button during Playback Mode, and move the mouse cursor above **[Text View]**.

② Click the **[CH##]** you wish to hide the POS transactions.

③ The check mark next to the **[CH##]** will disappear, and the text on the playback video will also disappear.

④ To display the POS transaction, just repeat the previous steps.

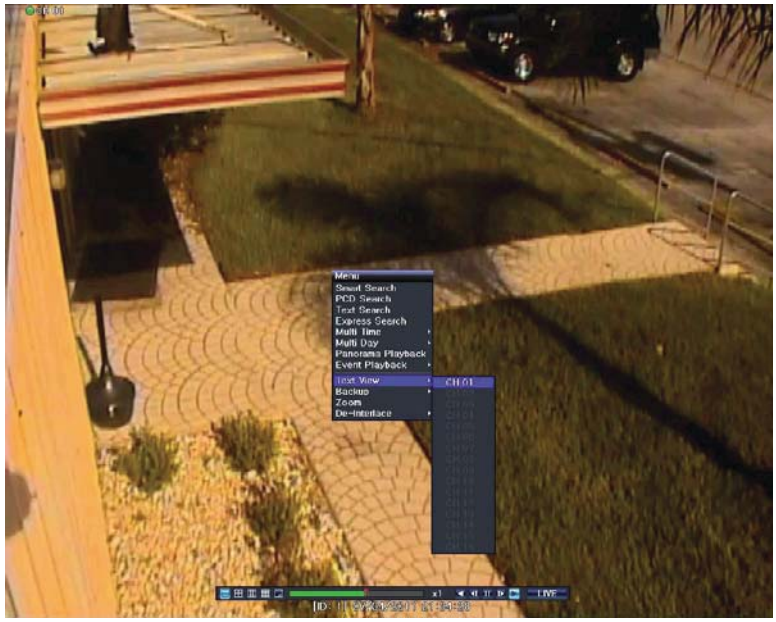

Motion

Select the Motion tab to configure the motion detection settings.

① Select Motion Area of each channel.

② When clicked, the single channel mode composed of square boxes appears on the screen. Use the mouse to select areas you wish to disable motion detection. Areas where motion detection is disabled will be indicated in the color brown.

③ Select Motion Area of each channel.

④ When clicked, the single channel mode composed of square boxes appears on the screen. Use the mouse to select areas you wish to disable motion detection. Areas where motion detection is disabled will be indicated in the color brown.

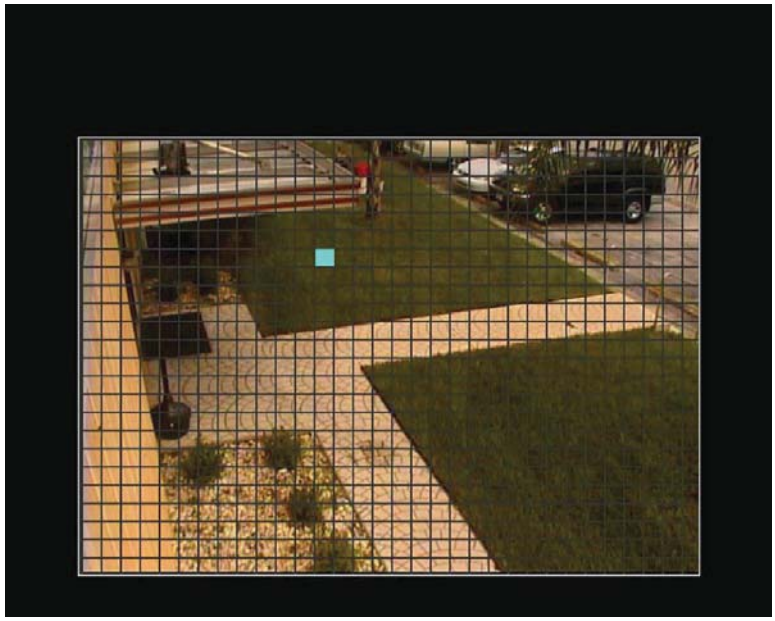

⑤ Once motion area has been set, set the Motion Sensitivity, Sensor Type, and/or Sound Sensitivity.

Relay
Select from NO (Normally Open) or NC (Normally Closed).
If the wrong type is selected, relay will not work.

NO, which is normally open, closes when a signal is received.
NC, which is normally closed, opens when a signal is received.

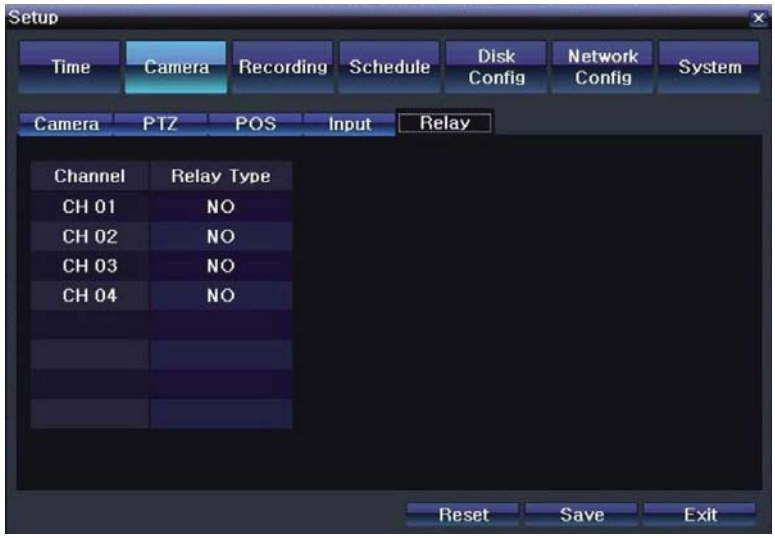

Relay Output Connection

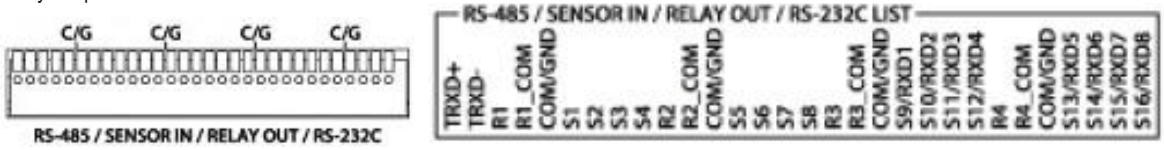

Relay output signal to external device such as Alarm or Siren.
Connect relay to R1, R2, R3, and/or R4 of the terminal block, located on the rear side with R#_Com Port.

※ Number of relay varies depending on the model of the DVR.

Recording

The Recoding setup is to configure the environment of the system's record configuration and major functions.
VMAXD1 allows you to create a more detailed recording schedule by setting four unique record configurations.

Right-click mouse button; then select **[Setup] > [Recording]**.
Select the specific schedule (Schedule1, Schedule2, Schedule3, Schedule4) you wish to configure, and change the settings for the selected recording schedule.

Event

Configure the camera to record for the different types of event—Motion, Sensor, Audio, Pattern, Text.
Set the event as ON to record when the type of event occurs. If you do not wish to record, set as OFF.
All Event recording follows the Event Speed which can be configured at **[Setup] > [Recording] > [Event Speed]**. See "**5.3.2 Recording**".

※ If none of the event options are turned ON, the VMAXD1 will record continuously.

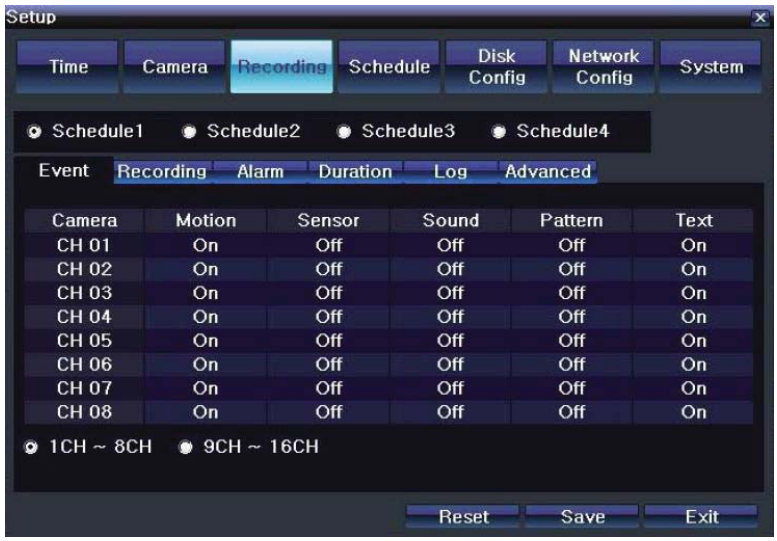

Event Type	Description
Continuous	The VMAXD1 will record continuously at the Normal Speed.
Motion	When the VMAXD1 detects motion, it will begin recording at the Event Speed.
Sensor	When an input signal from an external sensor is generated, the VMAXD1 will begin recording the event.
Audio	When audio is detected, the VMAXD1 will begin recording the event.
Text	When the POS device sends a transaction to the DVR, VMAXD1 will begin recording the event.

Recording
Set the details for the recording image and the recording speed.

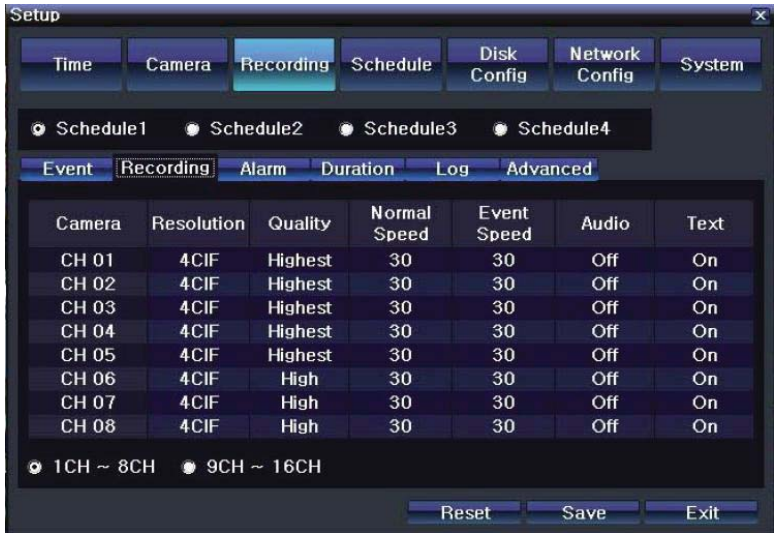

Recording Resolution: Set the resolution of the recorded channels. Select from CIF, 2CIF, and 4CIF.

Recording Resolution	NTSC	PAL
CIF	352·240	352·288
2CIF	704·240	704·288
4CIF	704*480	704·576

Recording Quality: Set the quality of the recorded channels. Select from Lowest, Low, Middle, High, and Highest.

※ The higher the quality, the larger the file size will be.

Normal Speed: When there is no event, the VMAXD1 will record with this frame rate.
Event Speed: This will be the recording frame rate for Event Recording, Sensor, and Audio.

MODEL	CIF (NTSC/PAL)	2CIF (NTSC/PAL)	4CIF (NTSC/PAL)
VMAXD1 16	480/400fps	480/400fps	480/400fps
VMAXD1 8	480/400fps	480/400fps	480/400fps

Audio: Set the recording of the external audio input connected to the VMAXD1. If you wish to record audio, set to ON. If not, set to OFF.

Alarm
This feature is used to generate alarms through the PTZ Preset, E-mail, Spot 1, Popup, and/or Callback in case of an event. You can configure up to eight presets (1-8).

※ Popup function is to inform event occurrence to the user through a warning window in the real-time monitoring mode.

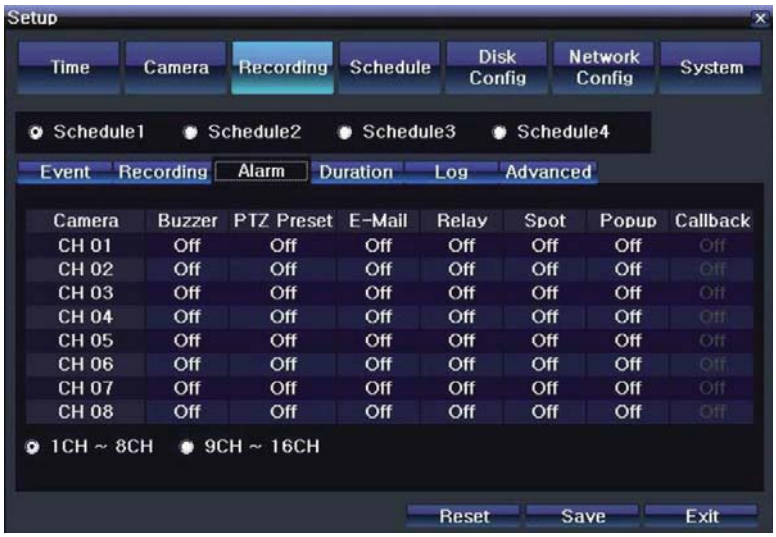

Buzzer: Makes a beep sound when event is triggered.

PTZ Preset: Set preset number. When event is triggered, PTZ camera will move to the selected preset.

E-mail: When an event is triggered, the VMAXD1 will send user an e-mail.
Setup your email at **[Setup] > [Network Config] > [E-mail]**.

Relay: When an event is triggered, relay out will be activated.

Spot: When an event is triggered, user will receive popup on spot monitor.

Popup: In real time recording mode, a Warning window will appear. This window will inform the user when an event occurs.

Callback: This will transmit a signal to a callback server located at a remote site and will begin recording automatically.
① Turn ON the Callback funtion.
② Set your Callback Server IP, Port Number, User ID, and event type.
③ Select one of the registered users.

Duration

Pre Alarm: Set as ON or OFF. If ON is selected, the VMAXD1 will record the frames of the last 7 seconds before the event occurrence.
Post Alarm: Set the duration you wish the VMAXD1 to record immediately after the event has ended. Select from 5, 10, 15, 20, 50, 100, and 300 seconds.

Log

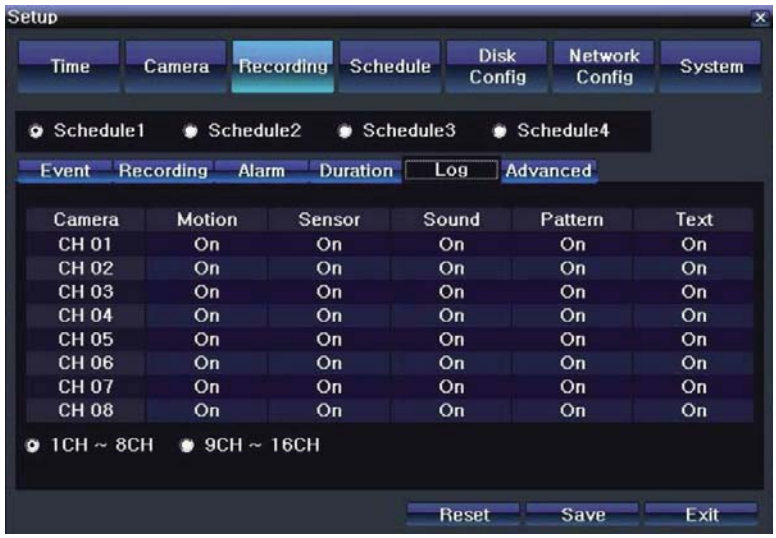

Set the VMAXD1 to generate and save specific log categories—Motion, Sensor, Sound, Pattern, and Text. If set as ON, the VMAXD1 will save the logs of that category.

Advanced

Watermark: Set as ON or OFF.

QP Control: This will help adjust the size of the files that need to be saved by adjusting the quality of the image. Select from CBR or VBR.
CBR will give you consistent file sizes but different image qualities.
VBR will give you consistent image qualities but different file sizes.

CBR and VBR can be set in 5 different levels, depending on the recording quality.

Schedule

VMAXD1 allows you to create a more detailed recording schedule by combining four unique record configurations on a weekly 24 hour basis.

Right-click mouse button; then select **[Setup] > [Schedule]**.
Select the specific schedule configuration (Schedule1, Schedule2, Schedule3, Schedule4) you wish to apply to the schedule, and use your mouse to select the time block(s) you wish to apply the configuration to.

Hour Button: Select all days and time.
Day (Mon~Hol) Button: Select Horizontal Line
Time (0~23) Button: Select Vertical Line

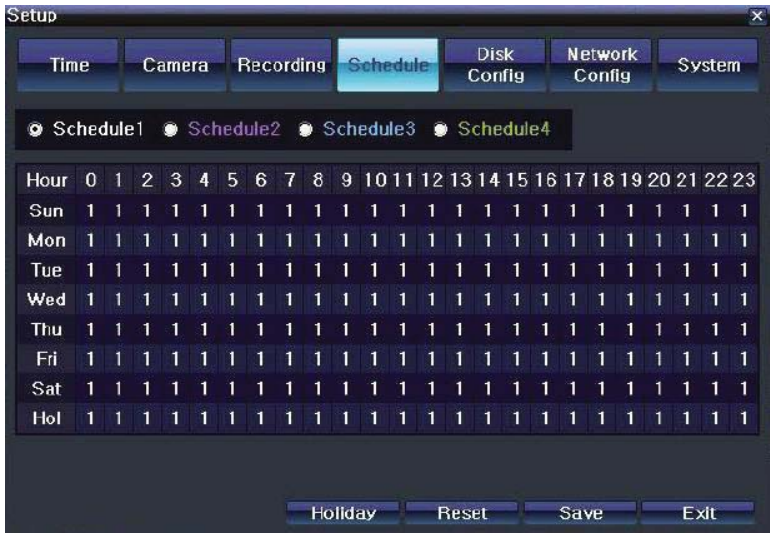

Holiday
This feature enables the user to set the holidays and schedule independently.

① Select **[Schedule] > [Holiday]**.

② On the Holiday Registration window, select the date by using the arrow keys; then, press the SELECT button.

③ After setting the holiday, click **[Save]** at the bottom of the menu.

If the holiday and day of the week are the same in the Schedule menu, the holiday will have priority over ordinary day in the weekly schedule. Designated holidays are indicated with a red tag.

Disk Configuration

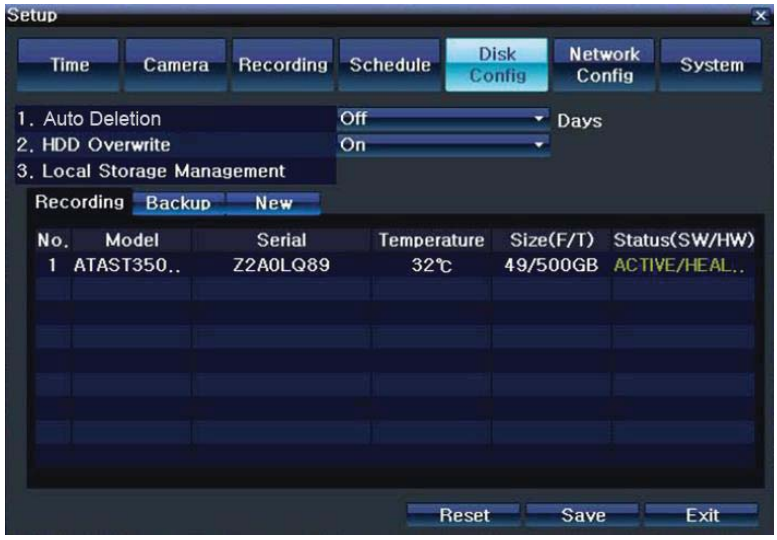

	In the Storage menu, remember to save the new settings after making changes. If not, the new settings will not be applied to the system. The system will initializes the menu to the basic setting.

Auto Deletion
Set a limit on the number of days within a month your VMAXD1 can record.
Select from None, 1Day, 7Days, 30Days, or User Setting (1-31).

HDD Overwrite

① Turn ON or OFF.

	If ON is selected and the HDD runs out of free space, the VMAXD1 will overwrite the existing files beginning with the oldest data. If OFF is selected, the VMAXD1 will not record.

Local Storage Management
Local Storage Management is where the internal hard disk and storages connected to the system via USB are managed. Local Storage Management classifies the different storage devices into the three categories—New, Recording, and Backup.

New: All storages, initially detected, are directly managed into **[New]**, but they can be transferred into **[Recording]** or **[Backup]**.
Select storage in the New category, and click the left mouse button. Then select Record-Init or Backup-Init.

Record-Init: Transfers the selected storage from New to Recording
Backup-Init: Transfers the selected storage from New to Backup.

Caution	At least one of the storage should be sent to **[Recording]**. Otherwise, recorded data will not be stored in real-time.

Recording: Storage devices place in Recording will only be used to store recorded data. The recorded data will be saved in real-time. In the Recording category, five commands can be executed. However, depending on the software status, some commands may not work.

The commands are as follows:
New: Returns the selected storage device back to the New category.
Online: Changes the selected storage device to Online state.
Offline: Changes the selected storage device to Offline state.
Format: Format the selected storage.
Eject: Completely removes the selected storage from the software.

	When the VMAXD1 is in Healthy or Warning state, the above commands will be executed. However, if the VMAXD1 is in a Fault state, no commands will be executed.

When removing a HDD installed to the VMAXD1 or a storage device connected to the VMAXD1 through a USB port, the user must execute the **[Eject]** command first.

Backup: The storage devices placed in Backup will only be used for backing up data. They can never be used to store data.

Depending on the storage type, the storage can only be used for Recording or Backup purposes.

Status Types of the Local Storage Device

	Software Status Types
Active	Connected to storage or backup device. It is currently saving the recorded data.
Online	Only connected to storage or backup device.
Offline	Not connected to storage or backup device.

	Hardware Status Types
Healthy	Connected to storage or backup device, and it functions normally.
Warning	Connected to storage or backup device, but an error was detected. In this state, recorded data cannot be stored or backed up. The storage device has a physical error that can be corrected by the storage device or by the DVR. If the error is not taken care of, the storage device has likely been damaged and shifted to the fault state. Replacing the device with a normal one is strongly recommended.
Fault	Not connected to storage or backup device, and it cannot record or backup data. The storage device is completely damaged, and none of the software operations can be performed. The fault state is not related to a DVR problem. The DVR has detected the fault and stopped the recording.

If there is an active storage device with a warning or a fault, a message is displayed on the upper left corner of the screen.

Instructions for Adding the Local Storage Device

① Open the system body and install a new disk. Connect the data cable and the power cable.

② Connect power to the system and boot the system.

③ Go to **[Setup] > [Storage]** by using the arrow keys and the SELECT button.

④ A newly displayed disk will then be displayed in the New category.

⑤ Select a newly installed disk by using the arrow keys and the SELECT button; then, initialize the disk as a Recording or a Backup disk. The following describes how to set the Recording storage.

⑥ Recording shows the status of the newly installed disk online.

Caution

※ **Selecting [Direct-Init]** or **[Backup-Init]** causes all data in the device to be erased. Therefore, caution is required.

※ While **[Direct-Init]** or **[Backup-Init]** is being set, do not remove the device, for it may cause an error when detecting the device.

※ To use the external or portable storage device for system upgrade, send New storage device to **[Backup-Init]** at **[Setup] > [Storage] > [Local Storage Management]**.

A USB device that has gone through this procedure will be detected in the Backup category automatically, when used again in the DVR equipment.

HDD Format for Direct Backup

Select the model first.

As shown below, proceed with the following order: **[Online] > [Format] > [Online]**

It may take some time during formatting.
After formatting, select the model again and set as Online.

Network Configuration

Ethernet

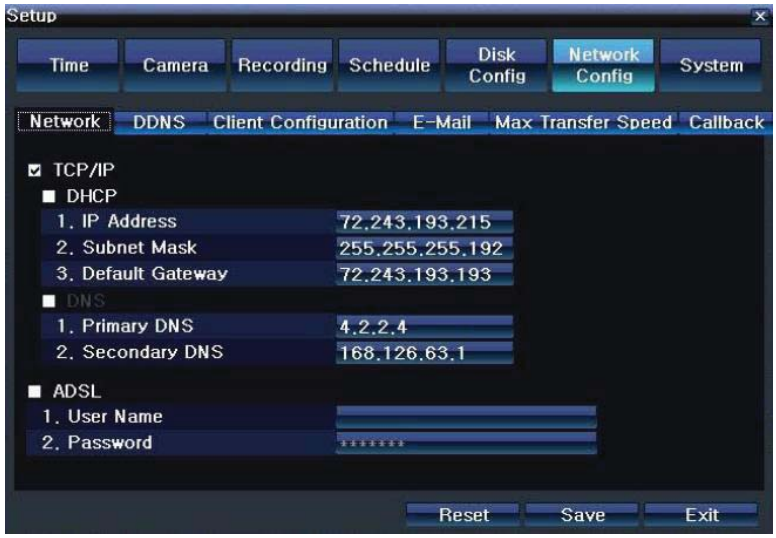

Select TCP/IP or ADSL and input the necessary information to connect your VMAXD1 to the network.

TCP/IP: Uses a fixed IP in the Local Area Network environment.

① Go to **[Setup] > [Network Config] > [Network]**.

② Check the box to use TCP/IP.

③ Enter the IP Address, Subnet Mask, Defualt Gateway, Primary DNS, and Secondary DNS.

④ Click **[Save]**.

ADSL: Uses the user authentication-type ADSL communication environment.

① Check the box to use ADSL.

② Enter the Username and Password.

③ Click **[Save]**.

DDNS

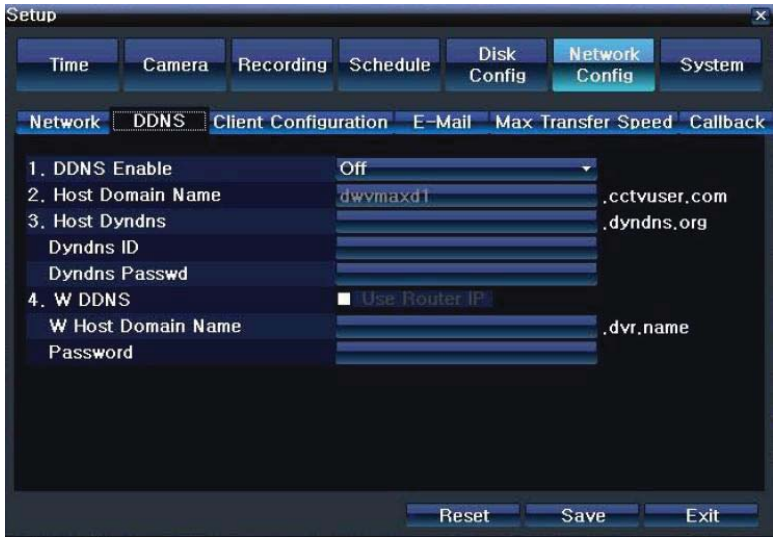

As part of the DNS system, the Dynamic Domain Name Server (DDNS) updates IP addresses of the host name in real-time and assigns fixed domain names to the systems linked to that DNS server, allowing users to use the same DNS name regardless of the change in the IP address. DDNS provides dynamic IP addresses to ensure URL access.
User can monitor the VMAXD1 from a remote location, using the built-in web server.

① Select from OFF, DDNS ON, DYNDNS ON, and W DDNS ON.
② If DDNS ON is selected, enter the Host Domain Name.
③ The registration procedure of the DDNS host domain name proceeds automatically. You can enter a host name that consists of 4-20 letters.
④ If the host name you enter has been pre-registered in the DDNS server, it will not work. The basic host name is the MAC address of the DVR.
⑤ If the host name you entered begins with “000c28”, none of the MAC addresses will work except those pertaining to that IP address.
⑥ If DYNDNS ON is selected, enter the DynDNS Username and the DynDNS Password.
⑦ If W DDNS ON is selected, enter the W DDNS host domain name and W DDNS Password.
⑧ Click **[Save]**.

※ Access to DynDNS sever (http://www.dyndns.org) and apply for the user account. Then, register the domain name to use, and enter the URL.
※ For more information, please access the DynDNS site.

Client Configuration

Go to **[Setup] > [Network Config] > [Client Configuration]**.
The Ports need to be set in order for the VMAXD1 to connect to the client software(s) properly.

CMS (VMS) Port: This is used to connect the VMAXD1 to a CMS or VMS software. The default value is between 2000 and 2007. A randomly chosen value can be used depending on the network environment.

Web Server Port :This is used to connect the VMAXD1 to a remote software. The default value is 80. If 80 is blocked, use a random number over 2000.

UPnP (Auto Port): This is used to connect the VMAXD1 to the network using a router.

E-mail

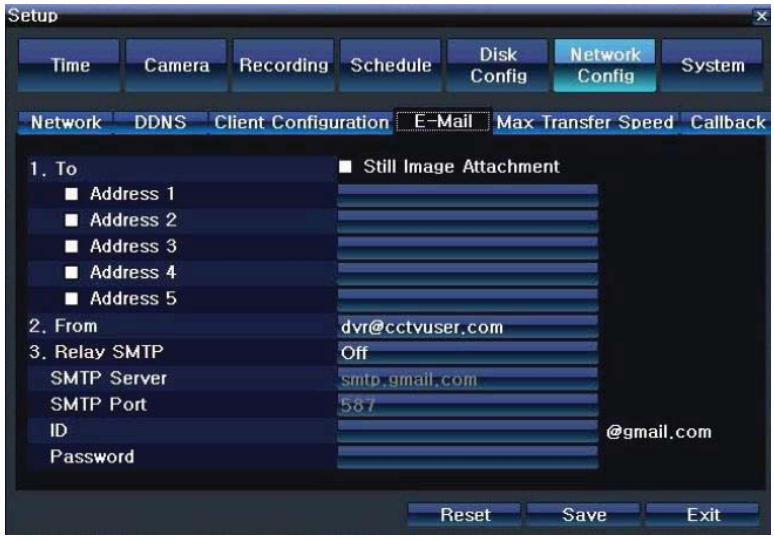

Set your VMAXD1 to send e-mail notifications automatically when an event occurs.
Go to **[Setup] > [Network Config] > [E-mail]**.

① Check **[Address#]** field, and enter e-mail address.

② To attach an image with the e-mail, check Still Image Attachment.

③ Enter sender's email address in the **[From]** field.

④ To use another e-mail server, set the **[Relay SMTP]** field.

To use this feature, go to **[Setup] > [Recording] > [Alarm]** and make sure E-mail is set to ON.
Also go to **[Setup] > [Network Config] > [Network]** and make sure the Primary DNS and/or Secondary DNS are configured.

Max Transfer Speed

This configures the settings for the data sent over the network.
Go to **[Setup] > [Network] > [Max Transfer Speed]**.

Select the settings of the picture(s) that you wish to send over the network.

Picture Resolution: Adjust the resolution of the picture(s) that are sent over the network.

Picture Quality: Adjust the quality of the picture(s) that are sent over the network.

Bandwidth Limitation: Set a limit to the bandwidth that is used when sending data over the network. The VMAXD1 will meet this limit by adjusting the image resolution and image quality.

Image Resolution	Adjust the resolution of the image. Select from CIF, 2CIF, 4CIF, HCIF, QCIF.
Image Quality	Adjust quality of the image. A higher value has a higher compression and transmission rate but a lower image quality.
Bandwidth Limit	You can set the network bandwidth between 40 ~ 4000kbps. As the value increases, the network transmission speed gets faster. Select OFF if you do not wish to limit the network bandwidth.

Callback

This feature will transmit a signal to a callback server located at a remote site and begin recording automatically.

① Check the Callback box to turn ON this function.

② Configure the Callback Server IP, Port Number, User ID, and Event Type.

③ For the Callback Server IP, user can enter an IP or a URL.

④ The port number should be over 2000 and should not overlap with the set values at **[Setup] > [Network] > [Client Configuration]**.

⑤ The user can select one of the registered users at **[Setup] > [System] > [Users]**.

⑥ Select the Transmission Codec, JPEG or H.264, for remote transmission.

⑦ Enable or disable mobile connection. To enable, turn ON Mobile Web.

System

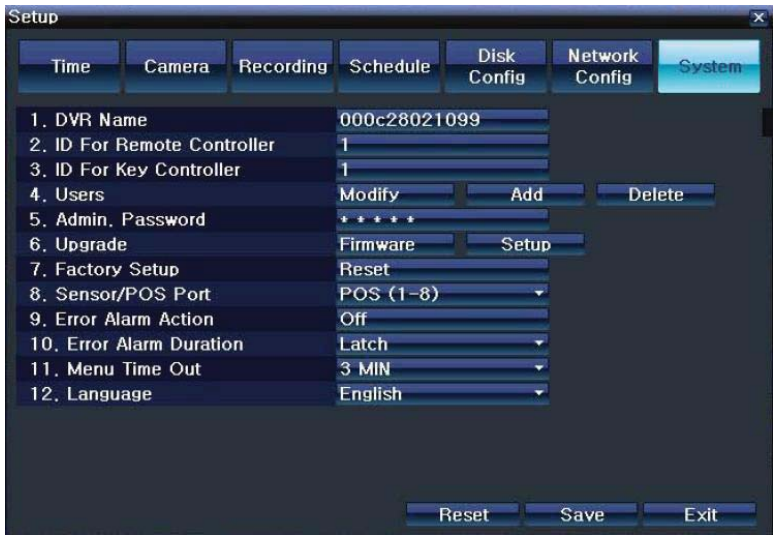

DVR Name
The default name is the MAX Address of the VMAXD1, but the name can be changed. The new name can consist of up to 20 letters.

ID for Remote Controller
To use remote controller, this ID must match the Remote Controller ID. If not, the remote controller will not be able to send input singles to the VMAXD1. The numbers 1 ~ 255 can be used as the ID.

① Go to **[Setup] > [System]**

② In the ID for Remote Controller selection window, enter ID by using the arrow keys and the SELECT button. The numbers 0 ~ 99 are available for ID.

If you forget the DVR ID, set the remote controller ID to 999 to start the DVR. However, note that the DVR ID should be the same as the remote controller ID.

※ Configure remote controller ID as 3.

1) Press **[ID]** button on the remote controller.
2) Press the **[0]** key and **[3]** key.
3) Press **[ID]** button again.

ID For Key Controller
To use keyboard controller, this ID must match the Keyboard Controller ID. If not, the keyboard controller will not be able to send input signals to the VMAXD1. The numbers 1 ~ 255 can be used as the ID.

① Go to **[Setup] > System]**.

② In the ID for Key Controller selection window, enter ID with the arrow keys and the SELECT button. The numbers 1 ~ 255 are available for ID.

Users
Add, Modify, or Delete the users who will be given permission to operate the VMAXD1. Up to 15 users can be created, and the administrator can limit the access authorizations of each user.

SYSTEM ACCESS AUTHORIZATION	
Network Live	View the real-time videos upon network access.
Playback	View the recorded images.
Copy (Download)	Copy and download files.
PTZ Camera	PTZ Camera Control
Setup	Recording, Schedule, System, Storage, Time, PTZ, Network, Screen Setup
Network Upgrade	Remote Network Upgrade
Covert Channel Monitoring	View the covert channel in the network.

Admin. Password
Setup the password of the administrator account. The password consists of a maximum of five digits.

Upgrade
Easily upgrade your VMAXD1 firmware or the VMAXD1 firmware or the Setup Menu Settings using an external or portable storage device. Make sure the storage device that contains the upgraded file is connected to the VMAXD1. Click Firmware to upgrade the VMAXD1 firmware. Click Setup to upgrade the setting values of the Setup Menu.

※ Find and copy the upgrade file to the highest folder in the external storage device or portable storage device that supports USB 2.0.
※ Connect the storage device with an upgrade file stored to the USB 2.0 port located on the left and right of the front panel.

1) When copying an upgrade file from the PC, delete the USB device properly from the PC or disconnect it from the USB port.
2) If the USB device is disconnected from the USB port while the upgrade file is being copied, the DVR system may not automatically detect the file.
3) Upgrading is impossible if the HDD is not mounted.

Caution
Removing a USB device during the upgrade may cause damage to the system.
The system starts over when the upgrade is completed.

Firmware Upgrade

① Select **[Firmware]** and the upgrade file list stored in the selected device with a simple description of the selected file are displayed. Select a file and Firmware Upgrade window will appear.

※ Downgrading to a previous version is not supported.
※ The Upgrade Information window will then appear within 15 seconds.

② Read the information and select **[Yes]** to start the upgrade gradually. Select **[No]** to return to the System Mode.
③ After the upgrade is completed, the system reboots.
④ To check the Firmware Version, right-click mouse button, and go to **[Information] > [Version]**.

Setup Upgrade

① Select **[Setup]** and the upgrade file list stored in the selected device with a simple description of the selected file are displayed. Select a file and Firmware Upgrade window will appear.
② Select a file and the upgrade will start immediately.

Caution
Select a file and then the upgrade starts immediately. All setting values of the current menu will be changed to the upgrade setting values.

Factory Setup
This will initialize all setting values, meaning all values will go back to the factory default value.

① Go to **[Setup] > [System]**.
② Click the **[Reset]** button.
③ Select **[Yes]** when Initialization window appears.
④ To cancel, click **[No]** or **[Cancel]**.

Caution
Note that all setting data will be initialized.
※ All values go back to Factory Default Value.

Sensor/POS Port
Select the device that will be connected to the VMAXD1 through the RS232C Port.

① Go to **[Setup] > [System]**.
② On the Sensor/Pos Port selection window, Choose from Sensor (9~16) or POS (1~8) by using the arrow keys and the SELECT button.

Error Alarm Action

Select how you wish to be notified of any alarm errors (Video Loss Signal, HDD Full, Fan Failed, HDD Failure, and Storage Warning).

① Go to **[Setup] > [System]**.

② On the Error Alarm Action selection widow, select how to be notified of the alarm. Select from Off Buzzer, E-mail, Relay01, and Popup Window.

※ Warning Window (Popup)
If Popup is selected, this Warning window will appear on the real-time monitoring screen. It will indicate Video Loss, HDD Full, Fan Failed, Storage Failure, and Storage Warning in white.

Error Alarm Duration

Set the duration of the alarm triggered by a system error.

① Go to **[Setup] > [System]**.

② In the Error Alarm Duration selection window, set Alarm Duration by using the arrow keys and the SELECT button.

③ Select from Latch, 5 SEC, 10 SEC, and Custom (5-60).

Auto Log Off

This is used to set a time for when the DVR automatically exits the Setup Menu and displays the real-time monitoring screen due to inactivity.

① Go to **[Setup] > [System]**.

② In the Auto Log Off selection window, select the time you wish to set, using the arrow keys and the SELECT button.

Off	Auto Log Off is not used. ※ The user can exit the menu by pressing the **[ESC]** button in the System menu.
1/2/3 MIN	If there is no input from the front button, remote controller, or mouse, the system will shift to the real-time monitoring mode after 1, 2, or 3 minute(s).
Custom	The user can enter the time directly. ※ The time can be set to 1-60 minute(s).

③ Selecting the Custom causes the Input window to appear.

④ Enter the time by using the numeric buttons or the arrow keys and the SELECT button.

Language

Select the language for the VMAXD1 OSD Menu. 17 languages are supported.

5 LIVE

Real Time Live View

After booting is finished, Audio, Recording Status, Channel Title, Connection Status, Time, and HDD Status are all displayed.

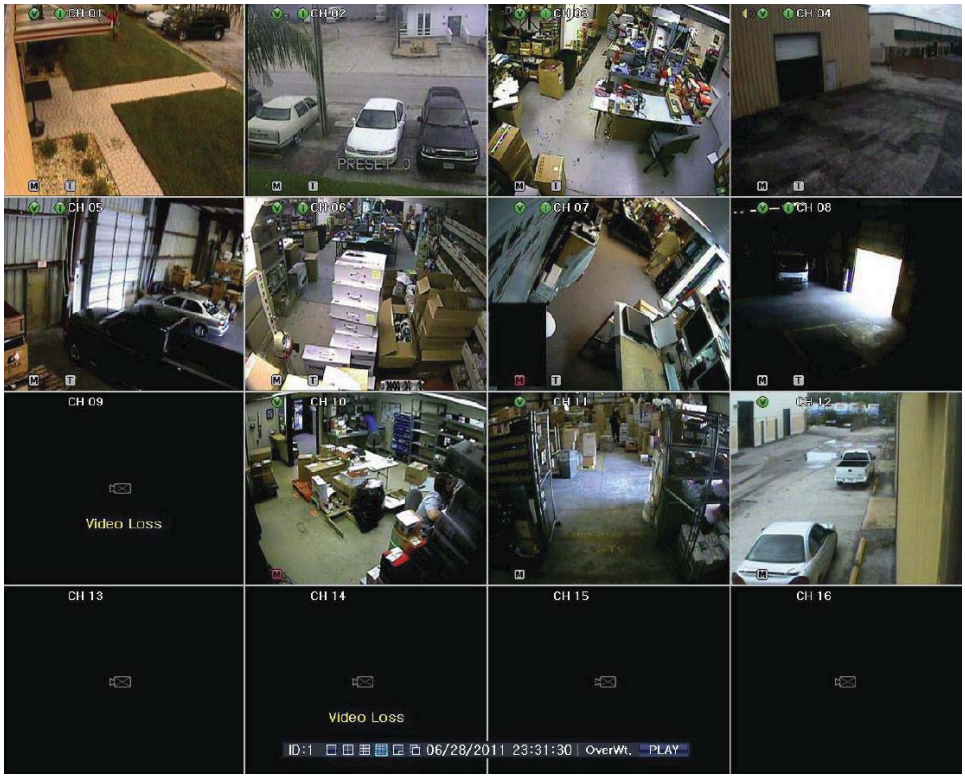

Status Icons

Recording Event	
M	Motion Detection Recording
S	Sensor Recording
A	Audio Recording
P	Pattern Change Recording
T	Text Recording

※Recording Event Icons are still displayed even when recording has been stopped.

Recording Mode	
V	Video Recording
A	Audio Recording
T	Text Recording

※Recording Mode Icons distinguish recording status.

Monitoring Mode	
	Video is not connected or Video is covert.
	Audio is set activated.
	Audio is set as silent.
No Signal	Camera has been disconnected.

Control Bar

① DVR ID
② Full Screen
③ 4 Channel Screen
④ 8 Channel Screen
⑤ 16 Channel Screen
⑥ Zoom
⑦ Auto Sequence Mode
⑧ Date & Time
⑨ Hard Drive Status
⑩ Playback

System Login

System users are divided into local administrators and general users. The local administrator can use all functions of the VMAXD1.

Local Admin	The local administrator can use all functions: System Power On/Off, Setup, Live View, and Playback. However, remote access is not available.
User	Up to four users are allowed. Each user can access the functions depending on the given authorities. For Authorization Setup, go to [**Setup] > [System] > [Users]**.

Authorization Setup Features

Network Live	View the real-time image by network access
Playback	View the recorded image
Copy (Download)	Copy and download the file from the network
PTZ Control	PTZ camera control
Setup	Recording, Recording Schedule, System, Storage, Time, PTZ, Network Setup, Screen Setup
Network Upgrade	Remote network upgrade
View Covert Channels	Enable viewing Covert channels

For security purposes, user must first log in to use the Setup menu for Monitoring Mode.

① On the Monitoring window, click the right mouse button.

② Select the SETUP button and the Login window should appear.

③ Select the ID and enter the Password. To exit, click CANCEL.

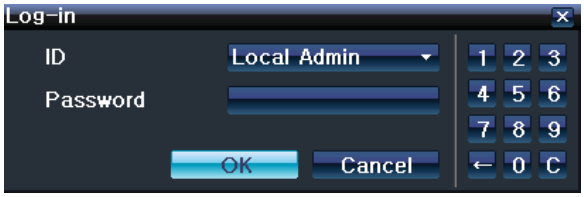

System Logout

After logging out, the user cannot use the Setup menu.

① On the Monitoring window, right click the mouse button.

② Click the icon and click YES when the Log-out window appears.

Screen Division and Auto Sequence

After the system has booted, images will be displayed on a 9 or 16 Screen Division Mode, depending on the model. The system follows user's setting for the screen division, once the DVR has been rebooted.
VMAXD1 Series provides the following screen division modes: 1, 4, 9, Big, 16, Biggest, and Auto Sequence.
1, 4, 9, and 16 are Basic Screen Division Modes. Big, Biggest, and Auto Sequence are Special Screen Division Modes.

In Basic Screen Division Modes, clicking the same Screen Division button as the one displayed will lead to the next camera or sets of cameras as shown below.

1 Screen Division Mode (16 Group)	
4 Screen Division Mode (4 Group)	
9 Screen Division Mode (3 Group)	
16 Screen Division Mode (2 Group)	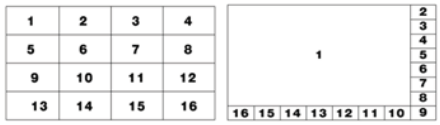

※ User can view an image as full screen by double-clicking a desired channel in the 4, 9, or 16 Screen Division Mode.
※ Mouse: Double-click on a channel to move to Big or Biggest Screen Division Mode of the selected channel number.

Auto Sequence is used to rotate images in 1, 4, 9, Big, or Biggest Screen Division Mode after a certain period of time.
Auto Sequence is not available in the 16 Screen Division Mode.

① Go to **[Setup] > [Information] > [Monitor Configuration]** to select a duration time (1-10 seconds) for Auto Sequence.
② Pressing SELECT button on front panel, SELECT button on the remote controller, or click the Auto Sequence Mode icon on the GUI with your mouse to initiate Auto Sequence.
③ Auto Sequence in 1, 4, or 9 Screen Division Mode.

1 Channel Mode Sequence	
4 Channel Mode Sequence	
9 Channel Mode Sequence	

Auto Sequence in Big Division Mode (Auto Sequence for Biggest Mode works in the same concept.)
This is only available when multiple cameras are connected.

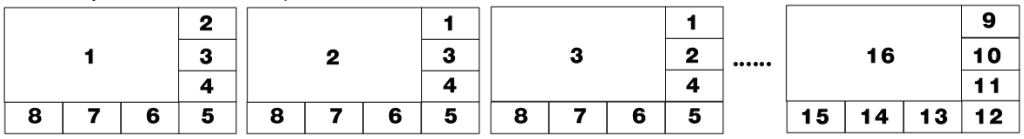

Zoom

This feature enables users to zoom in and/or out a single channel mode display during Real-Time Monitoring Mode.

① Click the right mouse button, and click the Magnifying Glass icon located on right corner of the Menu.

② After selecting a channel, the Single (1) Channel Display will appear with the zoom control screen displaying at the bottom-right.

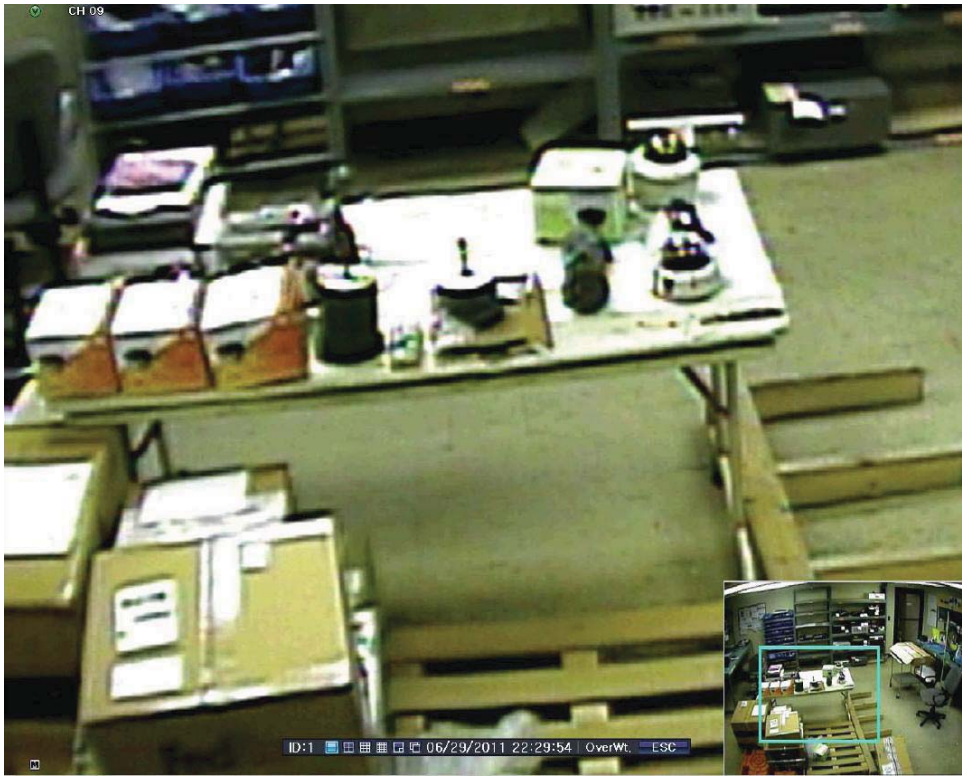

③ Move the mouse pointer to an area in the zoom control screen that you wish to magnify and double-click it.

④ It will zoom in 3 levels, normally x4 or x16. The 3 levels can be controlled using the wheel of the mouse. The user can also left-click and drag the yellow box to magnify the image more than x4.

⑤ If using the remote controller and/or front panel, zoom in 3 levels by clicking the SELECT button on the remote controller or the SELECT button on the front panel.

⑥ Use the arrow keys to shift the yellow box.

Instant Recording

In the Real-Time Monitoring Mode, the user can instantly start or stop the recording of all channels by clicking the RECORD button on the front panel of the VMAXD1.

Start Instant Recording

① In the Real-Time Monitoring Mode, click the RECORD button on the front panel.

② Start Instant Recording message will appear.

③ Click YES.

④ The recording status will be displayed.

Stop Instant Recording

① During record all in the real-time monitoring mode, hold on to the RECORD button until the Stop Instant Recording message appears.

② Click YES.

6 SEARCH

Express Search

Express search is the calendar search. This allows you to search and playback by Date & Time, Multi-Channel, MultTime, Multi-Day, and/ Event.

In the real-time monitoring mode, click the right mouse button, and select **[Search] > [Express Search].**

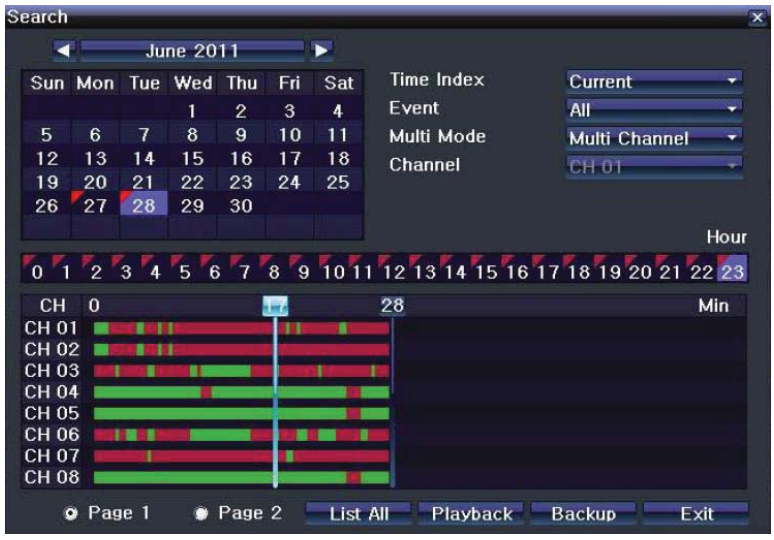

Date and Time Search

① Select the desired date. The red triangle located at the top-left of the dates in the calendar indicates that recorded data exists.

② Select the Hour (0 ~ 23). The recorded data will appear in the form of a bar graph.

③ Select an area on the bar graph to select the Minute.

Time Index

① When the user changes the time at **[Setup] > [Time] > [Date & Time]**, a new folder (titled "Index") is created, and the files saved in the folder before the time change can be found at **[Setup] > [Express Search] > [Time Index]**.

② Selecting **[Setup] > [Express Search] > [Time Index]** leads to a Selection window, where users can select a file from the different folders that were created before the last time change.

※ Searching by the file list is only available in the Multi-Channel Search

Current	Recorded image files with the current set time
Old Number	Recorded image files before the time change

Event
Event is used to search for a recorded data by events.
Select All, Motion, Sensor, Audio, and/or Text.

Multi-Channel Search
The Multi-Channel Search is to play recorded images of the different channel over a certain period of time.
① Select the desired Year, Month, and Date in the calendar window.
② After selecting the desired search date, each channel is then displayed as a bar graph in hourly increments.

The bar graph color in the real-time monitoring mode is same with recording event functionally.

③ Move the time line to a specific time point by using the arrow keys or the numeric buttons and press the SEARCH button.
④ Selecting the time leads to the recorded video display of each channel in the minute bar graph.
⑤ Move the time line to a certain time point by using the arrow keys and the numeric buttons and press the SELECT button. Playback will then start from the specified time point.

Multi-Time Search
The user can playback the video contents of the certain channel recorded in the different time zone simultaneously.
Entering into the search mode during the Multi-Time playback leads to the Multi-Time Search.
① The way of the date search is same as the Multi-Channel Search.
② The hourly recording status of the selected date is viewed after selecting a desired date.
③ Select the start time and channel by using the arrow keys.
④ The hourly displayed video of the selected channel will then be displayed in the minute bar graph.
⑤ Move the time line by using the arrow keys and the numeric buttons and specify the time. Afterward, press the Start button and play back the contents.

※ A different time zone means continuous 16 hours.

Multi-Day Search
The user can playback the video contents of the certain channel recorded in different dates simultaneously.
Entering into the search mode during the Multi-Day playback leads to the Multi-Time Search.
① The way of the date search is same as the Multi-Channel Search.
② The date list and the hourly recording status starting from the selected date are viewed by selecting the desired date.
③ Select the start time and channel by using the arrow keys.
④ The recorded video of the selected channel will then be displayed as the minute bar graph.
⑤ Move the time line by using the arrow keys and the numeric buttons and specify the time. Afterward, press the Start button and play back the contents.

Jump to Last Saved Data

The user can search and playback the last recorded data by Multi-Channel Mode.
In the real-time monitoring mode, click the right mouse button, and select **[Search] > [Jump to last saved data].**

Jump to First Saved Data

The user can search and playback the first recorded data by Multi-Channel Mode.
In the real-time monitoring mode, click the right mouse button, and select **[Search] > [Jump to first saved data].**

※ Go To The First and Go To The Last are only available in Multi-Channel.

Go to Last Played Time

The user can playback from the last played time by Multi-Channel Mode.
In the real-time monitoring mode, click the right mouse button, and select **[Search] > [Go to last played time].**

7 PLAYBACK

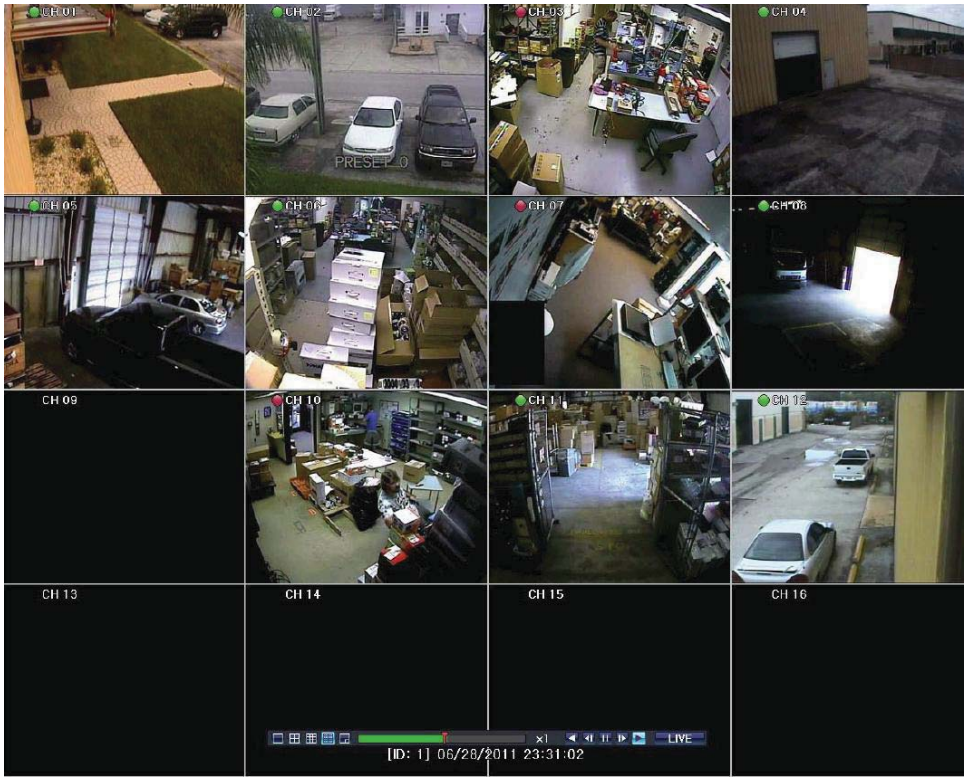

VMAXD1 Series provide a variety of playback functions: Smart Search, PCD Search, Express Search, Text Search, Multi-Time, Multi-Day, Multi-Channel, Panorama Playback, Event Playback, and Audio Playback.

To go to Playback mode, click the PLAY button located on the Control Bar of real-time monitoring mode.

Playback Control Bar

① In the Playback mode, user can playback video contents by using the buttons shown below.

② After the data is played to the end, the data of the next time zone will be automatically searched and played. This function is possible only in the Multi-Channel Playback mode. Both backward playback and forward playback are possible.

③ Using the buttons, the user can adjust the playback speed by x1, x2, x4, or x30.

No	Name	Description
1	Channel Mode Change	Just like the Live Mode, Screen Division Modes are available in the Playback Mode. 1, 4, 9, 16 Modes can be selected.
2	Zoom Mode	Switch to the Zoom mode.
3	Reverse Play / Fast Reverse	For every click the speed will increase. The speed ranges from x1 to x30.
4	Reverse Frame by Frame	Reverse Playback Frame-by-Frame Pause
5	Pause	Pause

6	Forward Frame by Frame	Forward Playback Frame-by--Frame Pause
7	Forward Play / Fast Forward	For every click the speed will increase. The speed ranges from x1 to x30.

Selecting the right-mouse button or menu button in the Playback Mode opens the Playback Menu as shown below.

Smart Search

This feature is used to search an image for movement within a specific zone.

① Go to Smart Search and select the desired channel.
② The screen will shift to the 32X24 grid mode. Select the areas where you wish to perform Smart Search. In the beginning, all pixels are selected. Designate an area by clicking the left mouse button and dragging the mouse pointer.
③ Repeat the previous step to select another area.
④ Click the right mouse button to specify the type of smart search you wish to perform.

Type	Description
Sensitivity	5 Levels: Lowest, Low, Middle, High, Highest
Minimum	Mosaic pixel control available between 1 - 10
Quick Search	In the NTSC mode, search 30 frames at a time. In the PAL mode, search 25 frames at a time.
Detail Search	Search all frames

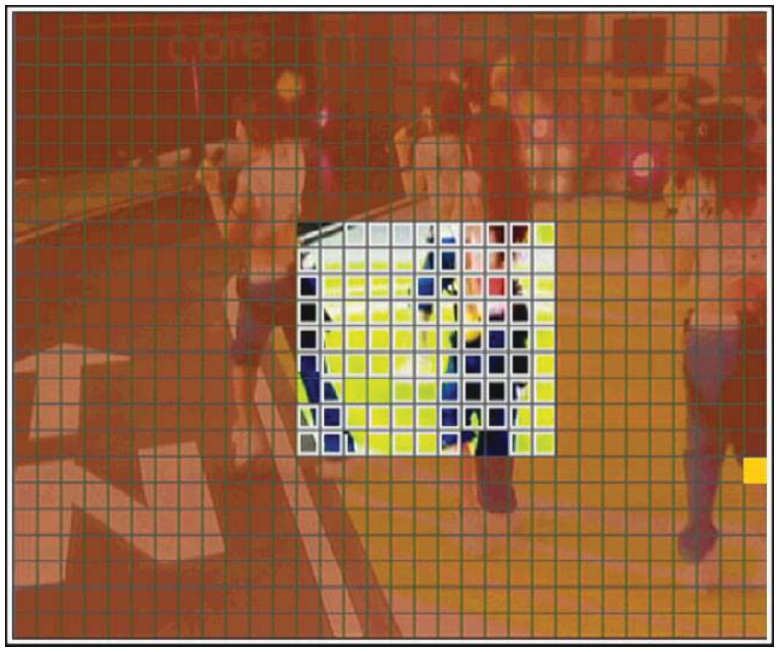

Smart Search detects motions in non-designated (brown) blocks.

⑤ When the settings are completed, click the Playback button to begin the Smart Search. The window below will appear.
⑥ The search may take time. Begin playback after search is completed.

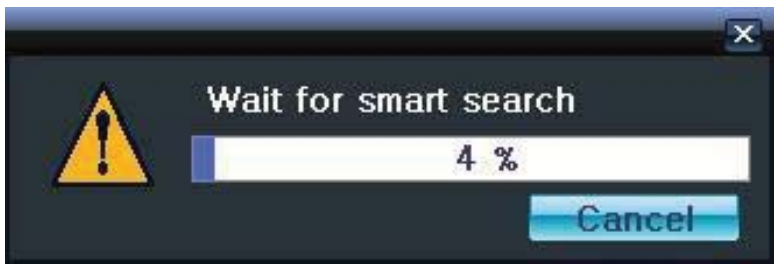

Express Search

Click the right mouse button during Playback mode, and select **[Express Search]**.
The Search window will appear.

Multi Time

The user can playback the video contents of the certain channel recorded in different time zones simultaneously. The search results are ordered from the oldest to the most recent videos.
Click the right mouse button during Playback mode, and select **[Multi Time]**.
View "**Search**" for more details.

Multi Day

The user can playback the recorded videos of a certain channel for different dates simultaneously. The search results are ordered from the oldest to the most recent videos.
Click the right mouse button during Playback mode, and select **[Multi Day]**.
View "**Search**" for more details.

For Multi Time and Multi Day, only 1 channel is available at a time.

Multi Channel

This playback feature simultaneously plays recorded videos of multiple channels for a certain designated time.

Panorama Playback

This feature plays recorded images of a selected channel frame by frame. Panorama Playback can be viewed at 16 frames, 8 frames, 4 frames, or even 1 frame.

Event

This feature searches and plays events. Select from All, Motion, Sensor, and/or Audio.

Audio

Select an audio channel you wish to play.

Backup

Capture and backup an image onto a CD or an External Device.

Backup: Save the image onto a CD or External Device.
Snapshot: Capture and save the displayed screen.

Zoom

Move to Zoom Mode. See "**Live**" for more details.

De-Interlace

Ally de-interlace to the image.

8 BACKUP

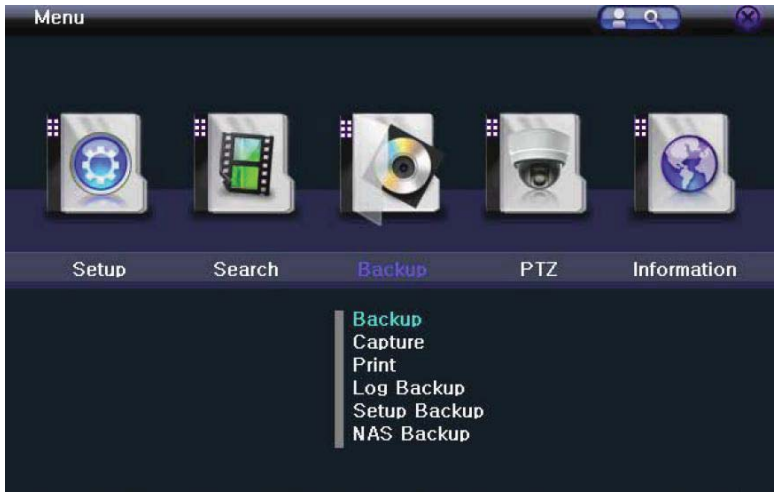

To backup the data, the PC shall be equipped with CD and DVD or connected with a storage device such as HDD, CD and DVD via the USB 2.0 port. For supported external devices, refer to "**APPENDIX**". The user can backup data in the real-time monitoring, search, log, or playback mode.

VMAXD1 also features NAS (Network Attached Storage) Backup.
User can backup data in real time monitoring, search, log, or playback mode.

Backup

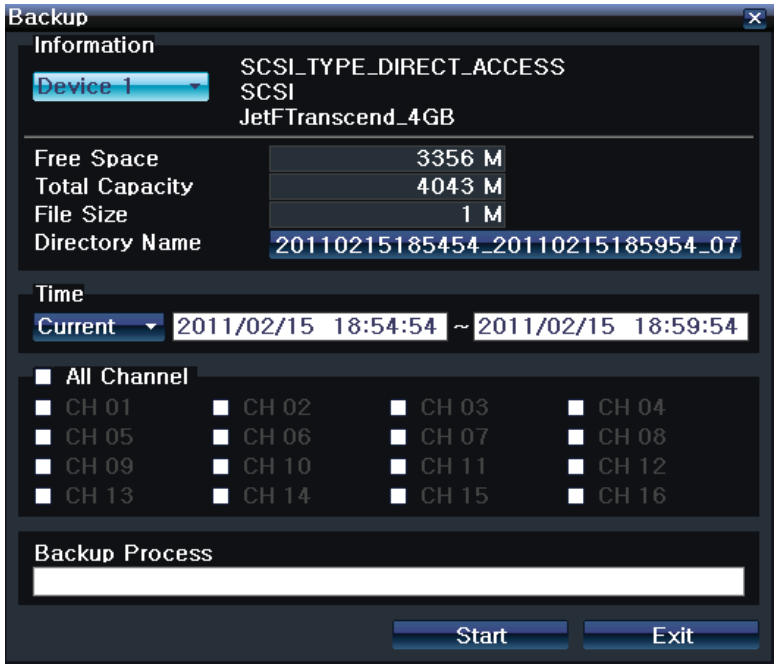

① Right click mouse button during real-time monitoring mode; then click **[Backup] > [Backup]**.
② A list of the devices that can be selected is outputted with simple information of the currently selected devices
③ When a device is selected, the free space and total capacity for the selected device are displayed.
④ To change the start and end time, press the Select button and adjust the date and time using the arrow keys. As a rule, the From time cannot be later than the To time. When setting is complete, click the ESC button.
⑤ The backup date and time is used to name the directory. The first 12 digits are determined by the year/month/day/hour/minute/second for From, and the 12 digits in the middle, by the year/month/day/hour/minute/second for To. The last 2 digits are determined by the number of folders in the selected device. Changing the backup time causes the name of the directory to be backed up to be changed as well.
⑥ If the file to be backed up exceeds the free space, its size is displayed in a yellow box in case the selected device is capable of rerecording and in a red box if not.

If the backup storage device is not formatted, in case the box displaying the size of the file to be backed up is displayed in yellow, and if backup is executed by pressing the Backup button, a prompt asking YES or NO whether to erase the device will appear. Selecting YES causes the storage medium for the selected device to be erased.

⑦ Press the Start button. A prompt asking YES or NO whether to proceed with the backup will appear.

※ Select YES to backup the data or NO to stop the backup.
Otherwise, press the **[Cancel]** button to return to the device selection mode on the backup window.

⑧ Select YES to continue the backup.

Capture

The Capture function allows the user create a JPG file in monitoring, playback, search, or log mode, and then, save the image data.

① To backup the currently displayed image, right click mouse button during real-time monitoring mode; then go to **[Backup] > [Capture]**.

② When only one USB2.0 backup device (excluding ODD devices) is searched, the JPG file is stored in the same device.

③ If there are no or more than two USB2.0 storage devices (excluding ODD devices), the below window for selecting the device will be displayed.

④ If the selected device is an ODD device, a prompt asking whether to backup in the ODD device will appear.

Print

The user can print the current displaying image and GUI.
Right click mouse button during real-time monitoring mode; then go to to **[Backup] > [Print]**.

A print using PS (POST SCRIPT) is recommended.

Log Backup

This is to backup system logs. These logs include General, Recording Event, Network, and Failure logs.

① Right click mouse button during real-time monitoring mode; then go to **[Backup] > [Log Backup],** and start the backup process after selection of the events.

.Log files are created at a folder shown below.
20100303_20100303_02_LOG
565645348945_20100303.log
.log file is the text file.

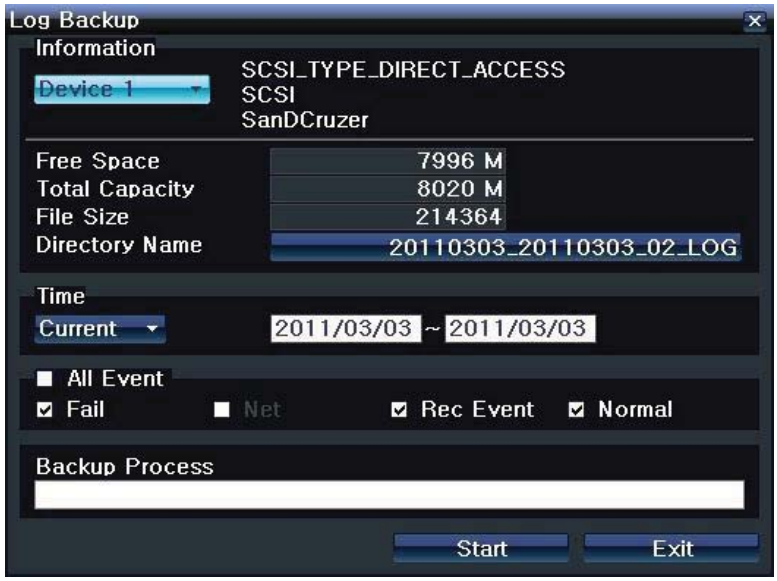

Setup Backup

The Setup Backup is to save the current menu settings. This function enables the user to copy the settings and apply the same settings to other systems.

① For the Setup Backup, a device for backup must be connected.

② Right click mouse button during real-time monitoring mode; then go to **[Backup] > [Setup Backup]** and a window shown below appears. The setup is copied by the name shown below.

Saved as the name below.

HD116T_565645348945_80_01_20100303_113237.bin

① ② ③ ④ ⑤

①Model ② DVR name ③ Version ④ Date ⑤ Time

③ Go to **[Setup] > [System] > [Upgrade] > [Setup]** after you insert the backup device.

④ Now, the user can easily upgrade a new device with the current setup values.

NAS Backup

The feature transmits a data from the DVR to backup network devices.
Right click mouse button during real-time monitoring mode; then go to to **[Backup] > [NAS Backup]**. The NAS Backup window will appear.

NAS On/Off: Turn ON or OFF NAS Backup. .
IP: Enter NAS device IP.
Account: Setup the account.
Directory: Designate a directory where the backup data is saved.
Overwriting: Turn ON or OFF overwrite function.

9 PTZ

Setting a PTZ Camera

This allows users to monitor live view, using a PTZ camera.
Connect the PTZ camera to the VMAXD1. For details on external connection, refer to “Terminal Block” in this manual.

① Select **[Setup] > [Camera] > [PTZ].**
② Configure the Protocol, ID, Baud Rate, Duration, and/or Tour.

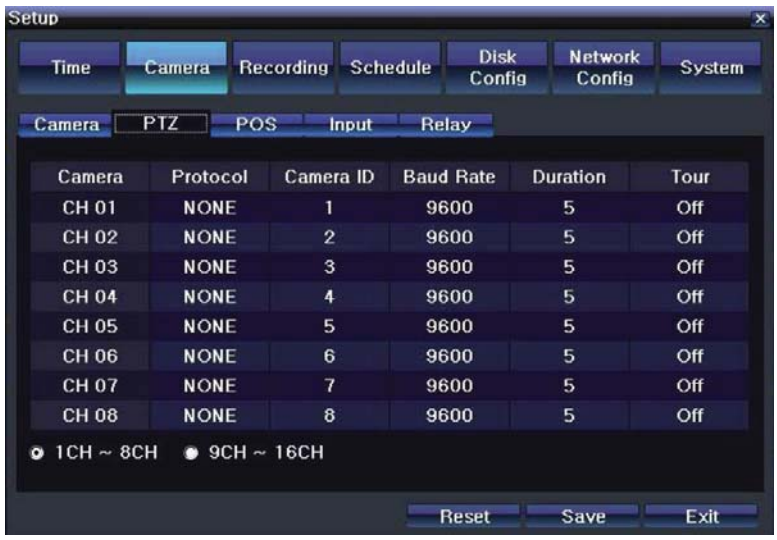
Setup
Time
Camera
Recording
Schedule
Disk Config
Network Config
System
Camera
PTZ
POS
Input
Relay
Camera | Protocol | Camera ID | Baud Rate | Duration | Tour
CH 01 | NONE | 1 | 9600 | 5 | Off
CH 02 | NONE | 2 | 9600 | 5 | Off
CH 03 | NONE | 3 | 9600 | 5 | Off
CH 04 | NONE | 4 | 9600 | 5 | Off
CH 05 | NONE | 5 | 9600 | 5 | Off
CH 06 | NONE | 6 | 9600 | 5 | Off
CH 07 | NONE | 7 | 9600 | 5 | Off
CH 08 | NONE | 8 | 9600 | 5 | Off
1CH ~ 8CH
9CH ~ 16CH
Reset
Save
Exit

※ Baud Rate can be selected at 2400, 4800, 9600, 19200, or 38400.
※ Duration can be selected at 5, 10, 15, 20, 5-60 (User Setting) seconds.
※ Tour consists of Tour 1 and Tour 2. Each tour can be set with 8 Presets.

VMAXD1 Series supports 21 protocols for PTZ control. For a list of supported protocols, refer to “**APPENDIX**” at the end of this manual..

Controlling a PTZ Camera

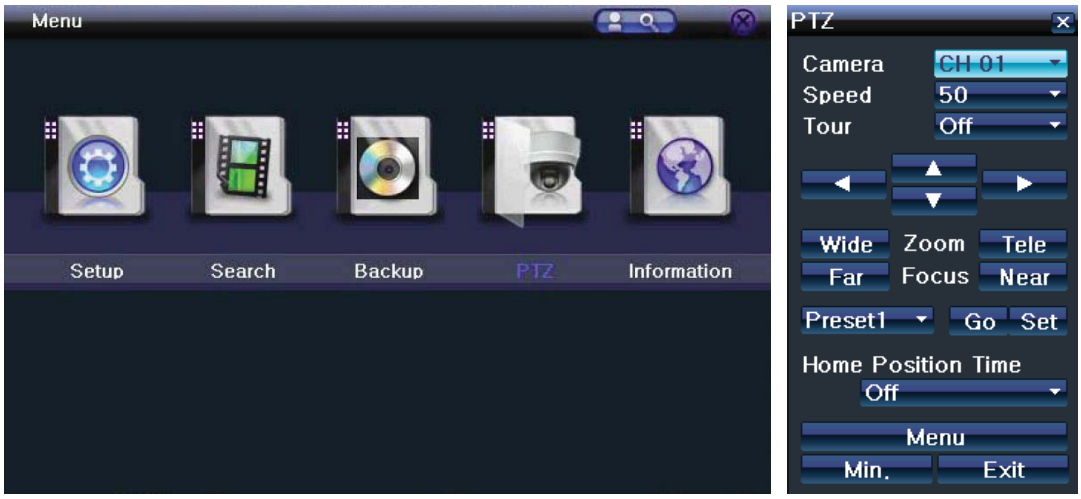

① To control a PTZ camera, go to **[Menu] > [PTZ]** or press PTZ button on the remote controller.
② Select Channel of the PTZ camera you wish to control.

Direction Keys: Adjust the PTZ camera to look at a different scene.
Wide: Zoom Out
Tele: Zoom In
Min. / Max.: Change PTZ controller to Min or Max mode.
Speed: 1 ~ 100; Adjust the speed of the PTZ camera.
Tour: Off, 1, 2
Preset: 1 ~ 8
Home Position Time: Off, 1, 4, 10, User Defined (1 ~ 60 minutes)

Preset.
Using the Horizontal, Vertical, Zoom, Focus features of the PTZ camera, view a specific spot of the image. Designate that spot as a preset and move to the preset quickly and automatically.

Home Position Time
Preset 1 is set as the Home Position. If there are no signals to the PTZ camera after a certain time, it will automatically go to the home position

10 System Information

Version

Displays all the general system information.
Go to **[Menu] > [Information] > [Version]**.

System Log
June 2011
Sun Mon Tue Wed Thu Fri Sat
1 2 3 4
5 6 7 8 9 10 11
12 13 14 15 16 17 18
19 20 21 22 23 24 25
26 27 28 29 30
Detailed Information
Page 1 / 841
06/20/2011
23:59:53
Motion Event
3 CH
All Fail Net Rec Event Normal
Time Event Information
23:59:53 Motion Event 3 CH
23:59:51 Motion Event 6 CH
23:59:41 Motion Event 6 CH
23:59:41 Motion Event 7 CH
23:59:40 Motion Event 3 CH
23:59:37 Motion Event 2 CH
23:59:37 Motion Event 4 CH
23:59:31 Motion Event 3 CH
23:59:30 Motion Event 2 CH
23:59:26 Motion Event 3 CH
23:59:21 Motion Event 2 CH
23:59:17 Motion Event 11 CH
23:59:17 Motion Event 2 CH
23:59:12 Motion Event 6 CH
23:59:09 Motion Event 4 CH
23:59:07 Motion Event 6 CH
Log Backup
Playback
Exit

System Log

Displays recorded event log information for each day.
Go to **[Menu] > [Information] > [System Log].**

① Go to **[Setup] > [Information] > [System Log]**; then the System Log window will appear.
② Using the mouse or the arrow keys and SELECT button, select a desired date on the activated Calendar.
③ The user can check the time and the log type by using the arrow keys in the log list.
④ Use the Up/Down button to check the logs by time and type on each page.
⑤ The user can shift the focus to a specific time zone to play a certain time. (Playback will start from the point when logs are saved.)
⑥ Click the right-mouse button or select SETUP button on the front panel and select Hour to move the desired log time zone.

Log Type
Categorizes the event type. User can select the different categories to display the logs of the specific category.
All: Logs related to all system operations. All categories will be displayed.
Fail: Logs related to system operation failures including signal loss and network connection failure.
Network: Logs realted to network operations including Network Login, Network Logout, and Network Live.
Rec Event: Logs related to the recording including Motion Detection, Sensor Detection, and Audio Detection.
Normal: Logs are related to Power ON/OFF, Backup Failure, Setup Start, Setup End, Playback, and other basic system operations.

Time Changed Log Data View
The stored data folder is created each time the user changes the time. The color blue is used to highlight a date in the calendar window when time changes have been made. To view log details, select a desired date with recorded data. Selecting the date highlighted in blue causes the Changed Date List window to appear.

Miscellaneous Control

Turn ON or OFF the external devices.
Go to **[Menu] > [Information] > [Misc Control].**

Audio
Select the Audio tab; then, select the channel(s) to be activated or Mute.

> VMAXD1 16 supports 16 channels of audio, and VMAXD1 8 supports 8 channels of audio.

Relay
Select the Relay tab; then, select those you wish to activate.

> VMAXD1 16 supports 4 channel inputs, and VMAXD1 8 supports 2 channel inputs.

Text
Select the Text tab; then, select the channels you wish to add text.

> VMAXD1 16 supports text input for channels 1 through 16, and VMAXD1 8 supports 4 channels of text input.

Spot
Spot is to output a channel that is set for a certain function, and Spot has an independent monitor and output. Spot is prioritized in the following order: Manual Spot, Event Spot, Sequence Spot.

> VMAXD1 16 supports 4 Spot Channels, and VMAXD1 8 supports 1 Spot Channel.

① Manual Spot
Go to **[Menu] > [Information] > [Misc. Control] > [Spot],** and configure the SPOT as Single, Quad, 4xQuad, or Sequence Mode.

② Event Spot
This feature quickly displays a channel that is set with event function to display when an event (Sensor, Motion, and Audio) occurs. The event check interval is one second. If events are detected in many channels, the channel with the last event will display.
To configure, go to **[Setup] > [Recording] > [Alarm] > [Spot].**

③ Sequence Spot
The user can select more than one channel for Manual Spot and have a sequential image display through Spot.
To configure, go to **[Menu] > [Information] > [Misc. Control] > [Spot].**
Select the Sequence option.

Monitor Configuration

Configure the Camera Title, Control Bar, Button Sound, HD Frequency, Screen Saver, Spot Sequence, Main Sequence, and TV Adjustment.
Select **[Information] > [Monitor Configuration]**, and the Single Channel Screen Mode will display with Monitor window.

Camera Title: Turn ON to display the camera title on the display screen.
Control Bar: Turn ON to display the control bar on the live view.
Button Sound: Turn ON or OFF the sound that is heard when a button is pressed.
Screen Saver: Turn ON or OFF the screen saver.
Spot Sequence: Set the time for the sequence function to hold each channel on spot monitor. This option will also allow you to set the sequence display.
Main Sequence. Set the time for the sequence function to hold each channel on main monitor. This option will also allow you to set the sequence display.
TV Adjustment: Adjust the location of the TV OUT screen by moving it Up, Down, Left, and/or Right.

⚠	Excessively moving the screen up, down, left, or right may cause black or gray areas to appear on the display screen. The level at which such condition does not occur is based on the proper control range of the monitor.

Channel Grouping

Channel Grouping is used to switch the channel locations in the Monitoring Mode.

① On the real-time monitoring screen, select **[Setup] > [Information] > [Channel Grouping]**.
② Select a channel to be switched. When you click a window, a yellow camera icon will appear. Drag that icon to the location you wish to move the channel.
③ The Image location of each channel is changed.

📖	※ Grouping is not supported for the 1 Channel Division mode. ※ The user can drag the focused channel and drop on the desired channel to switch the location by using a mouse. Also dragging the unfocused channel and dropping on the focused channel is allowed. ※ Changing the screen division mode causes other division modes to be changed as well. ※ This is only available in the Basic Screen Division Modes and not available in the Special Screen Division Modes.

11 REMOTE ACCESS

There are two types of remote software available: PC Web Viewer and Mobile Web Viewer.

Features

Live Monitoring and Playback
Relay Control and Two-Way Audio
Screen Capture
Digital Zoom
PTZ Control
Preset Movement
Remote Detail Setup

Connection

① Open Internet Explorer and enter the IP Address for your VMAXD1.
② Select PC or Mobile Web Viewer.
③ Enter the Port (2000), Username, and Password.
User Name: **User1**, Password: **1111111**
④ For PC Web Viewer, click OK button to login. For Mobile Web Viewer, click LOGIN button.

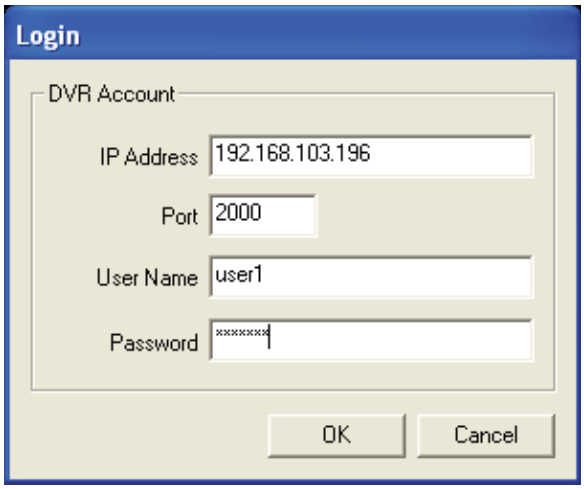

PC Web Viewer Login

Mobile Web Viewer Login

Live Mode

Display real-time live view of connected camera by clicking

button. If no cameras are connected, an image will not display.

Image	Name	Description
	Display Mode	Used to change the screen division mode.
	Sequence	Activate sequence of connected cameras.
	PTZ Control	Use to control PTZ camera. This can be used on live mode.
	Capture	Use to capture the current display image. When clicked, the capture image will appear. Click the right mouse button and press Save As to save the captured image. Click the right mouse button and press Print to print the captured image.
	Digital Zoom	Zoom in image with thumbnail view. Zoom size can be adjusted. Drag red box to zoom on a specific image.
	Remote Menu	Click during Playback mode to set DVR configurations remotely.
	Relay Control	Remotely activates relay out. Click Relay Control button; then click one of the Number Buttons.
	Two Way Audio	Activates Two-Way Audio.

Playback Mode

Display playback mode by clicking

button. Playback Mode also allows user to search recorded data.

No	Name	Description
1	Live / Playback	Switch display from Live Mode to Playback Mode or Vice Versa.
2	Capture	Use to capture the current display image. When clicked, the capture image will appear. Click the right mouse button and press Save As to save the captured image. Click the right mouse button and press Print to print the captured image.
3	Maximize	See the entire screen image.
4	Display Mode	Used to change the screen division mode.
5	Calendar Search	When searching for recorded data, set the date and time first and then click the Calendar Icon. The system will begin playing from the selected data and time.
6	Control Button and Adjust Bar	Use when playing back recorded videos.
7	Volume Control	Adjust the audio volume.

Management

User can remotely manage the VMAXD1. During Live Mode, just click the Management

button.

The Management Button features the following: DVR Setup, Application Setup, Adjust, DVR Setup Manager, Remote Upgrade, Search, and Backup.

DVR Setup

Product Information: Displays Product Version, HDD Inormation, IP Address, etc.
Bandwidth Limitation: Adjust picture quality and frame rate according to your network surroundings. If your network is slow, set a low or medium frame rate and picture quality and CIF resolution.
Network Account: Edit the registered user account remotely. Press Edit button and set different authorities for each user.

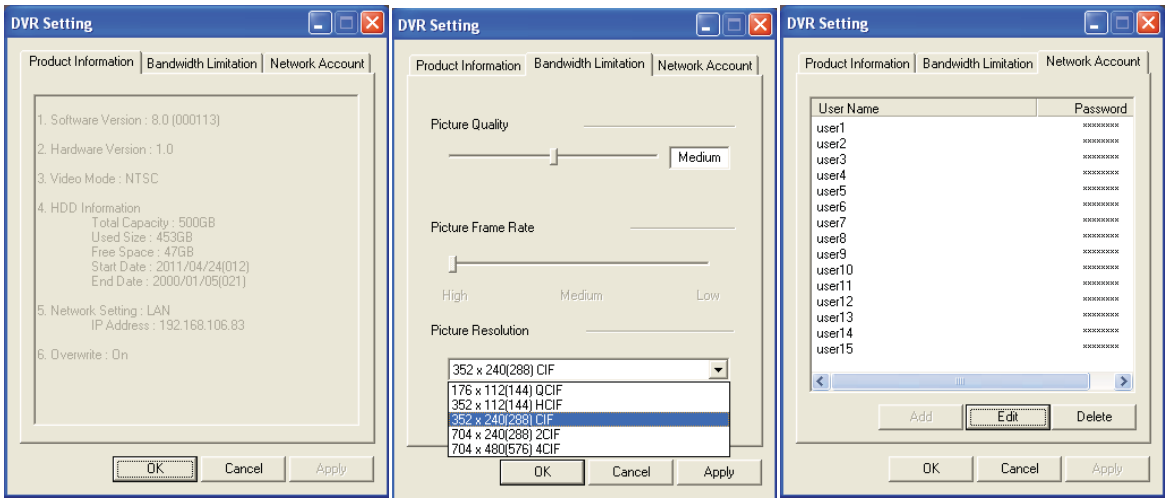

Application Setup
Enables user to set the filter option for display image and the duration time for the Sequence function.

Adjust
Allows user to adjust the image color, brightness, and other camera settings.

DVR Setup Manager
Contains all configuration setup information like your VMAXD1 system. User can remotely configure most of the settings with this tool.

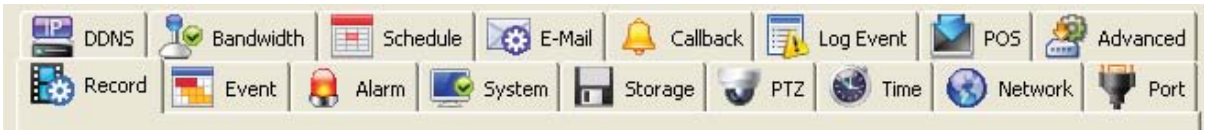

Search
Perform a Date & Time Search with this feature.
① Select Search button.
② Select Date and Time; then Click Next button.
③ Set Minute.
④ Click Playback. Playback of selected date and time will begin.

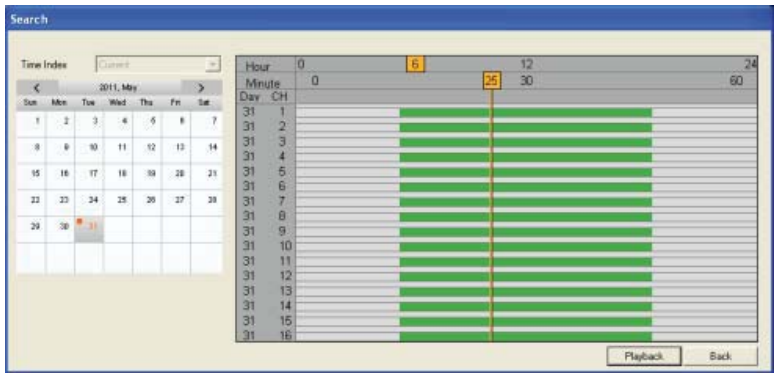

Backup
Remotely backup your recorded data.
① Select Backup button.
② Set the Start (From) and End (To) Time for backup.
③ Select the channel(s) to backup.
④ Set folder path and click Start button to begin backup.

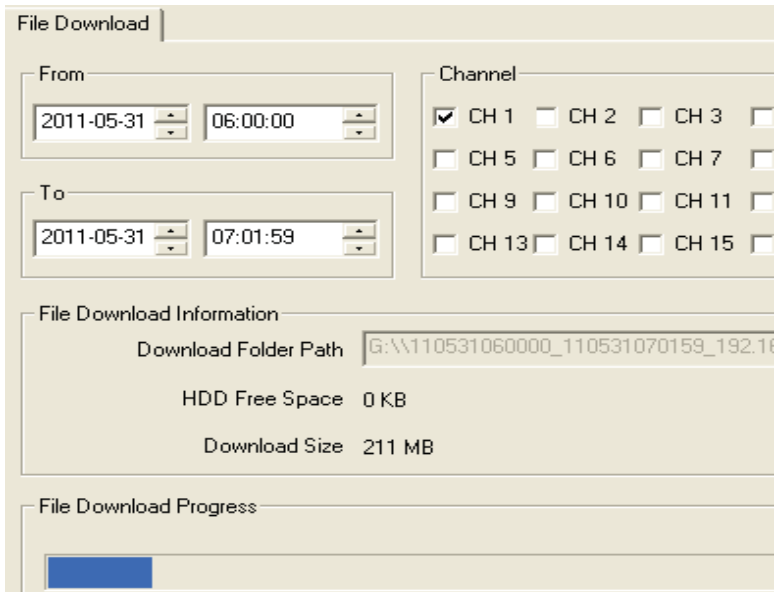

12 DNA

DNA stands for DVR Network Agent. It connects to the DVR(s) and controls it from a remote location.

Setup

Install DNA Remote Client Software on your PC for powerful remote client features.
We recommend all users to download DirectX 9.0 before installation. To install DirectX 9.0, go to [http://www.microsoft.com].

① Insert the included CD in your client PC.
② Select [DNS.msi] file.
③ The following window will appear. Press [Next].

DNA
Welcome to the DNA Setup Wizard
The installer will guide you through the steps required to install DNA on your computer.
WARNING: This computer program is protected by copyright law and international treaties. Unauthorized duplication or distribution of this program, or any portion of it, may result in severe civil or criminal penalties, and will be prosecuted to the maximum extent possible under the law.
Cancel
< Back
Next >

④ Select User and press [Next].

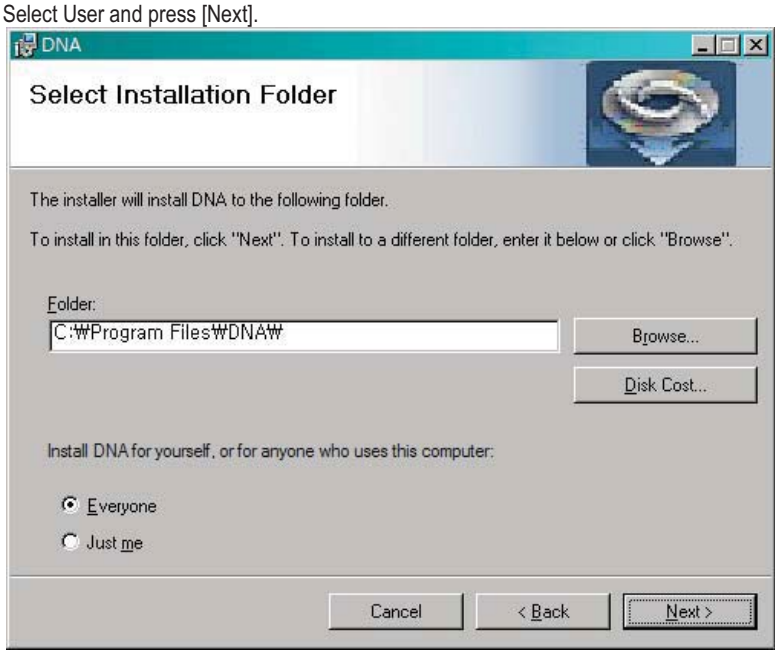
DNA
Select Installation Folder
The installer will install DNA to the following folder.
To install in this folder, click "Next". To install to a different folder, enter it below or click "Browse".
Folder:
C:₩Program Files₩DNA₩
Browse...
Disk Cost...
Install DNA for yourself, or for anyone who uses this computer:
Everyone
Just me
Cancel
< Back
Next >

⑤ Installation will begin. Press [Close] when it is completed.

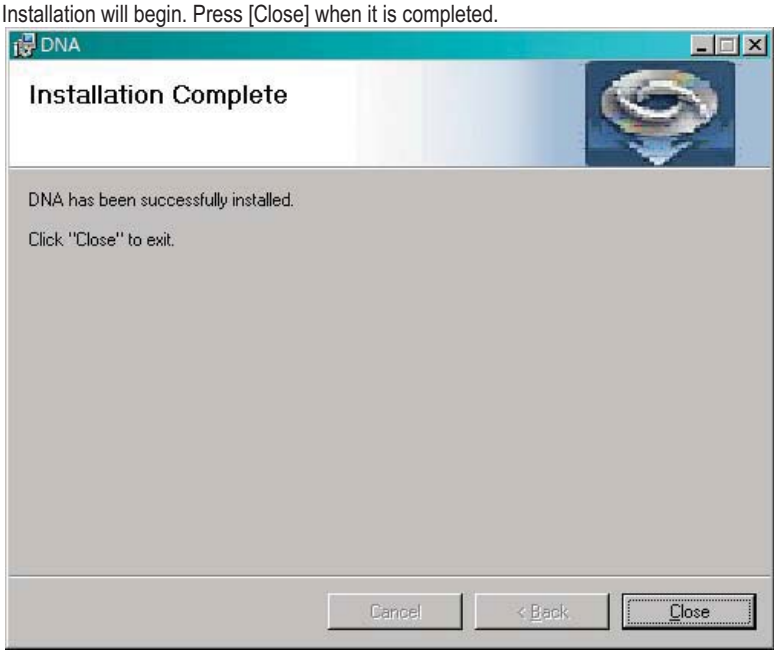

User Interface

No	Name	Description
1	Information Button	Displays DNA version number.
2	Display Mode	Switch to Full Screen or Minimize the window.
3	Exit	Power OFF the DNA Software.
4	Site List	DVR and Cameras listed on DVR/CH. DVR(s) registered as a favorite will be listed on the Favorite list.
5	Settings / Save and Print	Configuration: Enter Setup menu. Print: Print current page. Snapshot: Capture and save current video image. Rotate: Rotate images, Sequencing Log in / Log Out
6	Mode	Switch from live, playback, control, or event mode.
7	Pause	Stop and resume a video.
8	Message	Send a message.

Configuration

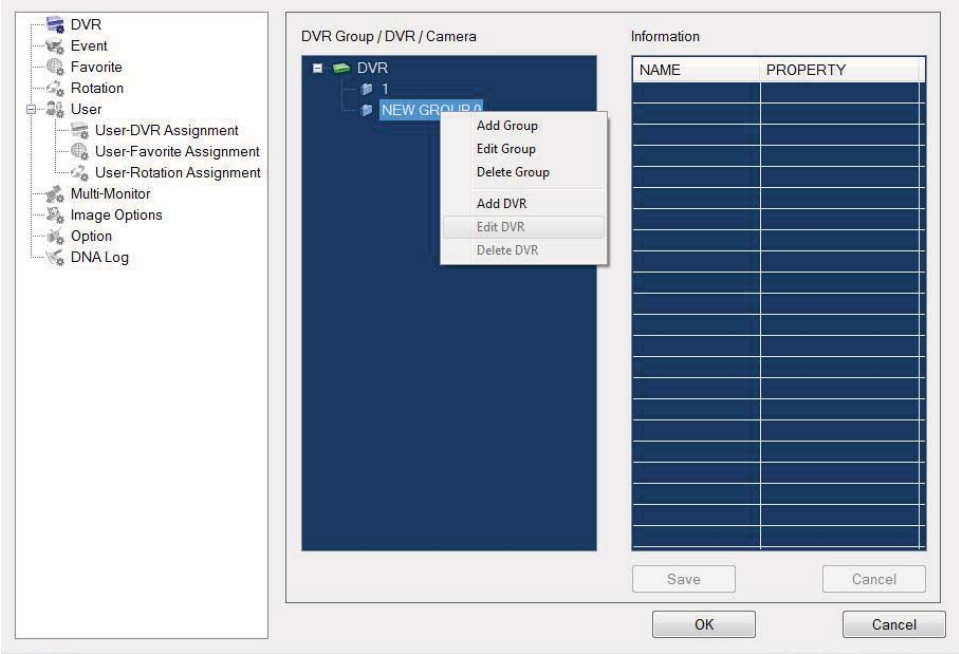

Adding a DVR

① Login to the DNA software. User ID is **Admin**. Password is **00000000**.

② Enter [Configuration].

③ Under DVR Group/DVR/Camera list, select [DVR] and click the right mouse button.

④ Select [Add Group] and type a name for the new group.

⑤ Select the new group and click the right mouse button. Then, select [Add DVR].

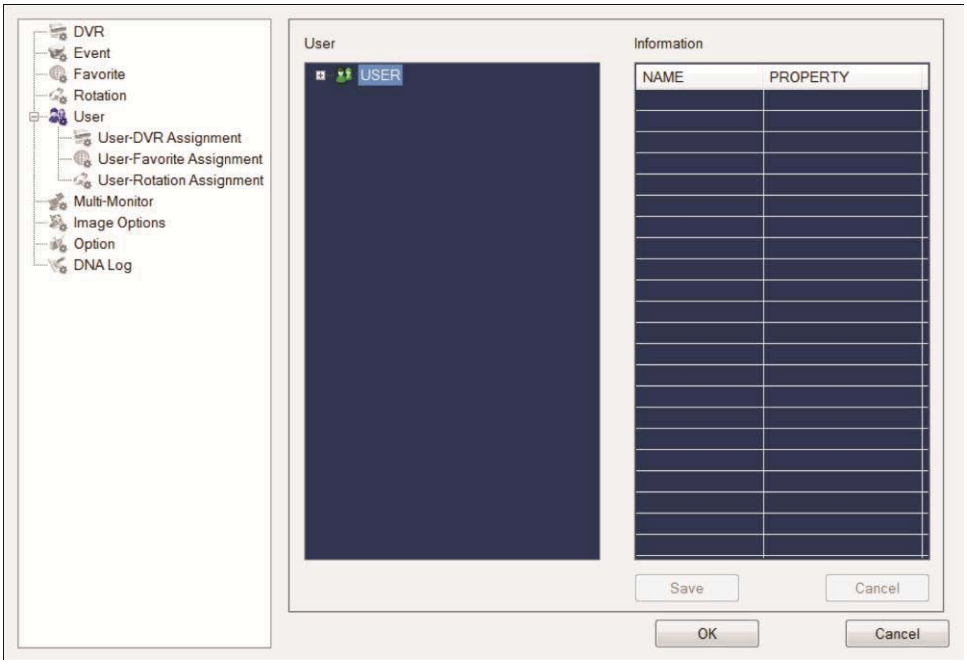

Adding a User

① Enter [Configuration].

② Select [User] from the left column.

③ Under the User list, select [USER] and click the right mouse button.

④ Select [Add User].

⑤ Enter the user information to the right.

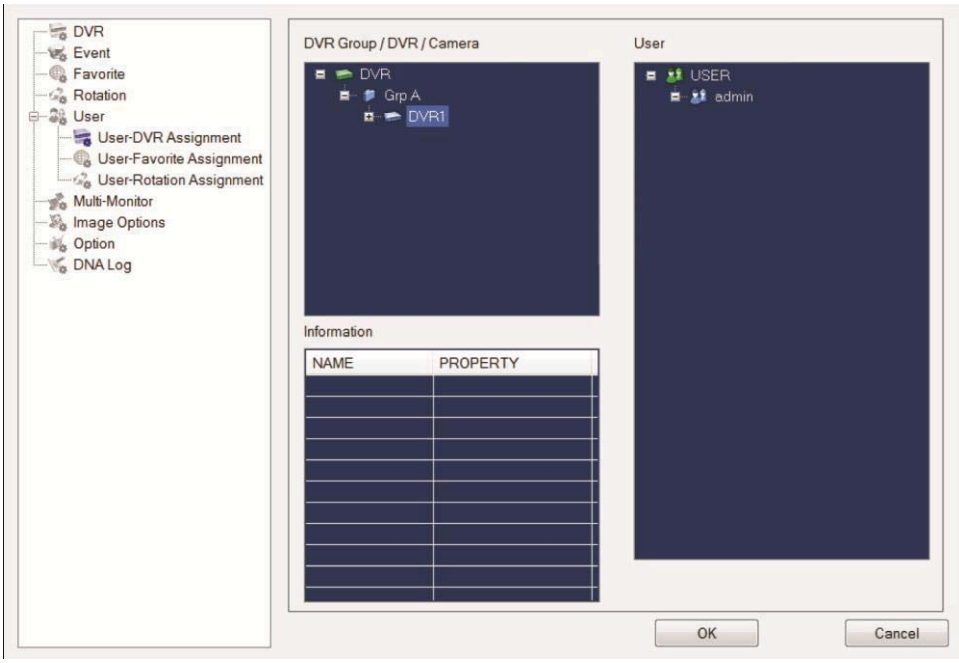

Assigning User(s) to a DVR

① Enter [Configuration].
② Select [User-DVR-Assignment] from the left column.
③ To grant access to the DVR, drag and drop the registered DVR in the middle column to the User(s) you wish to give access to.
④ Select [Add User].
⑤ Enter the user information to the right.

Playback

DNA enables you to search and playback recorded videos remotely.

① Select 

.
② The calendar will appear. Select the date which has the recorded video.
③ Press [OK] button.
④ The results will display in [Open File] window.
⑤ Select the data you wish to see, and click [OK].

Time Date Search

View the results as a timeline by clicking [Time/Date Search] tab on the top of the window.
User can easily select a different date and time.

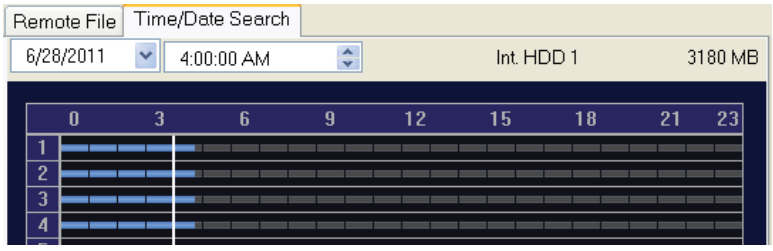

Remote File

Recorded videos for the searched date will appear. Each line represents one hour time increments.

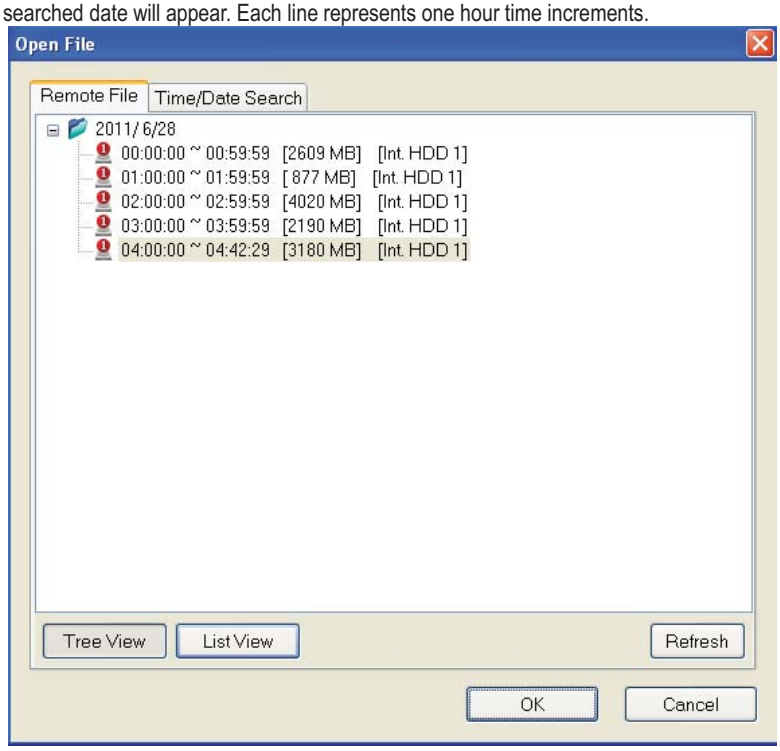
Open File
Remote File
Time/Date Search
2011/ 6/28
00:00:00 ~ 00:59:59 [2609 MB] [Int. HDD 1]
01:00:00 ~ 01:59:59 [877 MB] [Int. HDD 1]
02:00:00 ~ 02:59:59 [4020 MB] [Int. HDD 1]
03:00:00 ~ 03:59:59 [2190 MB] [Int. HDD 1]
04:00:00 ~ 04:42:29 [3180 MB] [Int. HDD 1]
Tree View
List View
Refresh
OK
Cancel

Control

Of

Select the

tab for information on the DVR, such as connected cameras, motion detection, sensor input, alarm output, and logs.

The logs are separated into the categories All, Fail, Network, Record, and Normal.

Through Control, you can enter the setup configuration on your connected device. Setup pages will differ according to the device.

Event

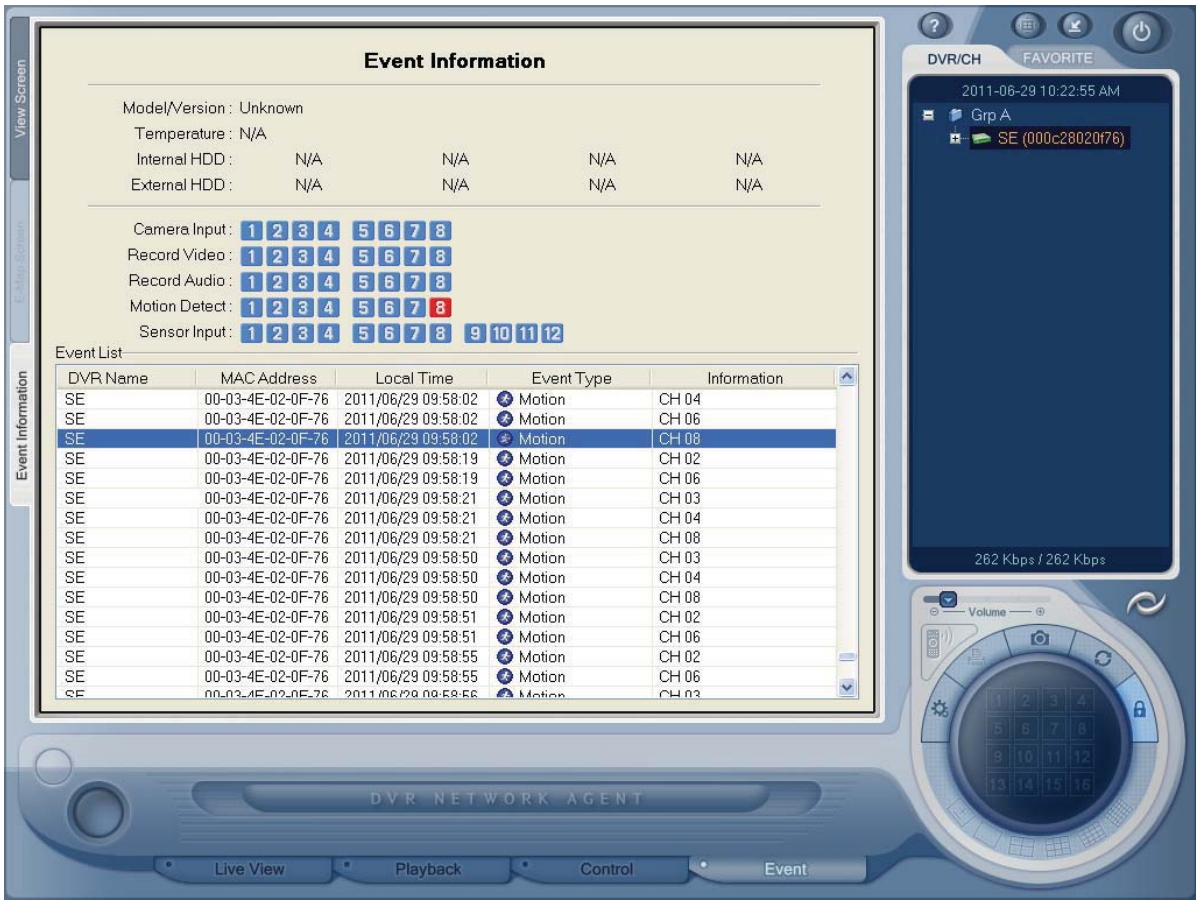
View Screen
Event Information
Event Information
Model/Version : Unknown
Temperature : N/A
Internal HDD : N/A N/A N/A N/A
External HDD : N/A N/A N/A N/A
Camera Input : 1 2 3 4 5 6 7 8
Record Video : 1 2 3 4 5 6 7 8
Record Audio : 1 2 3 4 5 6 7 8
Motion Detect : 1 2 3 4 5 6 7 8
Sensor Input : 1 2 3 4 5 6 7 8 9 10 11 12
Event List
DVR Name | MAC Address | Local Time | Event Type | Information
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:02 | Motion | CH 04
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:02 | Motion | CH 06
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:02 | Motion | CH 08
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:19 | Motion | CH 02
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:19 | Motion | CH 06
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:21 | Motion | CH 03
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:21 | Motion | CH 04
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:21 | Motion | CH 08
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:50 | Motion | CH 03
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:50 | Motion | CH 04
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:50 | Motion | CH 08
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:51 | Motion | CH 02
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:51 | Motion | CH 06
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:55 | Motion | CH 02
SE | 00-03-4E-02-0F-76 | 2011/06/29 09:58:55 | Motion | CH 06
DVR/CH
FAVORITE
2011-06-29 10:22:55 AM
Grp A
SE (000c28020f76)
262 Kbps / 262 Kbps
Volume
DVR NETWORK AGENT
Live View
Playback
Control
Event

Event page displays current incoming event(s).

User can play the event as a playback.

① Select a specific event.

② Right click mouse button and click [Play].

13 RAID

The VMAXD1 supports RAID 1 and RAID 5 (Up to 8 Terabytes).

Configuring RAID

① Prepare the hard drives and connect to the VMAXD1.

> ⚠ RAID 1 requires more than 2 HDDs. RAID 5 requires more than 5 HDDs.

② Turn VMAXD1 ON. Right click VMAXD1 and go to **[Setup] > [Disk Config] > [New]**.

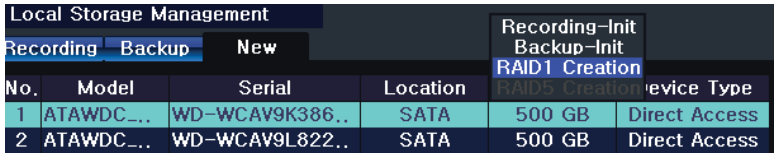

③ Select the HDD and click **[RAID 1 Creation]**.

> ⚠ For RAID 5, select **[Raid 5 Creation]**.

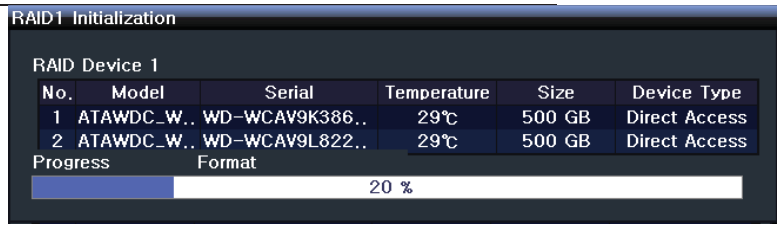
RAID1 Initialization
RAID Device 1
No. Model Serial Temperature Size Device Type
1 ATAWDC_W.. WD-WCAV9K386.. 29℃ 500 GB Direct Access
2 ATAWDC_W.. WD-WCAV9L822.. 29℃ 500 GB Direct Access
Progress
Format
20 %

④ Press OK to initialize RAID.

⑤ When completed, RAID will move to Recording tab.

⑥ To check the configured RAID information, go to Recording tab. Then, select the RAID and click RAID Info.

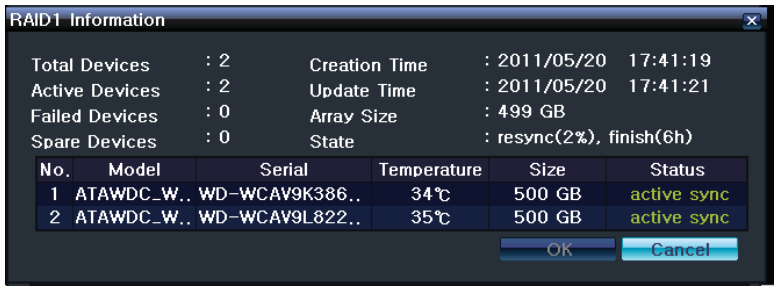
RAID1 Information
Total Devices : 2
Active Devices : 2
Failed Devices : 0
Spare Devices : 0
Creation Time : 2011/05/20 17:41:19
Update Time : 2011/05/20 17:41:21
Array Size : 499 GB
State : resync(2%), finish(6h)
No. Model Serial Temperature Size Status
1 ATAWDC_W.. WD-WCAV9K386.. 34℃ 500 GB active sync
2 ATAWDC_W.. WD-WCAV9L822.. 35℃ 500 GB active sync
OK
Cancel

Resync
This will occur when synchronization is broken by unexpected power failure. During this process, resolution would be restricted to CIF at 120fps.

Recovery
The VMAXD1 will synchronize again when RAID configuration has been changed. For example when a different HDD is configured, when a different HDD is detected, and/or when a redundant HDD is changed.

Destroying RAID

Destroy RAID to return to normal recording from RAID configuration.

① Right click VMAXD1 and go to **[Setup] > [Disk Config] > [Recording]**.

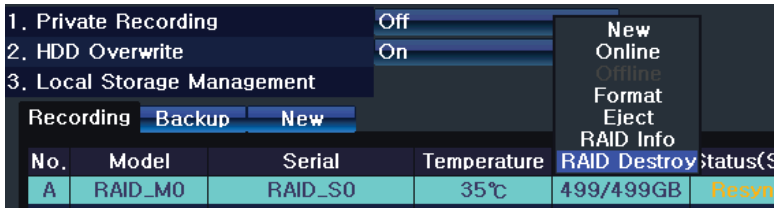

② Select the RAID you wish to destroy; then click RAID Destroy.

If RAID Destroy is not selectable, select Offline first.

③ Click YES when the popup window appears. .

APPENDIX

Recommended HDD Specification

Type	Size	Capacity	Buffer	RPM
SATA I, II	3.5“ 1, 2 Flat	Up to 1.5TB	over 8MB	over 7200

Recommended PTZ Camera Protocol

Vendor	Model	Protocol
Digital Watchdog	Digital Watchdog	DWC-PTZ10X
		DWC-PTZ39X
A.D.	ULTRA_7	SENSORMATIC
	ULTRA_8	
CHOU	COHU3925	COHU
Dongyang	Dongyang	DRX-500
		DY-255
DYNACOLOR	DSCP	DSCP
EYE VIEW	EYE VIEW	EYE VIEW
FINE SYSTEM	CRR-1600i/s	CRR-1600i/s
GE	GE	GE_KARATEL
GSP	GSP	CYBERSCAN_1
HITRON	FASTRAX2	FASTRAX2
HONEYWELL	SCANDOME2	HSDN-251
LG	LG	LG_MULTIX,
		LG_OLD
MIKAMI	MIKAMI	MIKAMI
ORIENTAL	ORX-1000	ORX-1000
PANASONIC	WVCS854	WVCS854
PELCO	PELCO	PELCO – D
		PELCO - P
PHILIPS	PHILIPS	PHILIPS
PROLINE	PROLINE	PROLINE_UK
RIFATRON	RIFATRON-1	RIFATRON
SAMSUNG TECHWIN	SAMSUNG	SPD-1600
		SCC641
SUNJIN	SUNJIN	SUNJIN
VICON	VICON	VICON
YOKO	YOKO	YOKO

Recommended USB 2.0 Device

USB2.0 DEVICE	MEDIA	FILE SYSTEM
Memory Stick	Flash Type	FAT32
2.5” Portable USB HDD	HDD Type	FAT32
CD	CD R, R/W	ISO9660
DVD	DVD +R, +R/W	ISO9660

5436 W Crenshaw Street Tampa, FL 33634
Toll Free: 866-446-3595
Tel: 813-888-9555 Fax: 813-888-9262
www.Digital-Watchdog.com
technicalsupport@dwcc.tv
Technical Support Hours: Monday – Friday
8:30AM to 8:00PM Eastern Standard Time